

# Multipurpose Downlight Module

## GLI-MDM

INSTALL AND MAINTENANCE MANUAL

### WARNING

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Turn off electrical power before installing or servicing luminaire in any way.
5. To reduce the risk of fire and overheating, make sure all connections are tight.



**May result in serious injury or death.  
Turn power OFF at circuit breaker  
prior to installation or servicing.**

# Multipurpose Downlight Module

## CAUTION

- Check input voltage before connecting the track system to avoid damage.
- The installation and removal of lamps require professional technical personnel to operate.
- Check for signs of damage when opening the package. If broken glass is found, reach out for replacement.
- Professional technical personnel is required to operate, install or remove the track system.
- To avoid electric shock, turn off all lighting fixtures when connected to the power supply.
- DO NOT expose wiring to sheet metal edges or other sharp objects to avoid wiring damage.
- DO NOT alter or create any open holes in wiring or electrical components when installing.

## INSTALLATION INSTRUCTIONS

### PRE-INSTALLATION

Before beginning installation, turn OFF power from the electrical panel and select desired color temperature by sliding switch on the back of the unit. (Fig. 5)

Available CCTs are 3000K, 4000K, 5000K or 2700K, 3000K, 4000K or 2700K, 3000K, 3500K, 4000K, 5000K.

### INSTALLATION FOR LED 4" GLI-MDM

#### STEP 1

Remove existing trim and CFL or incandescent bulbs.


#### STEP 2

Plug the female connector of the retrofit-kit onto the male connector of the socket adapter assembly. (Fig. 2)

(If you used E26 socket, please screw E26 socket adapter into socket in housing.) (Fig. 1)

#### STEP 3

Tuck all wiring into the housing and push the trim up flush to ceiling surface. (Fig. 3)

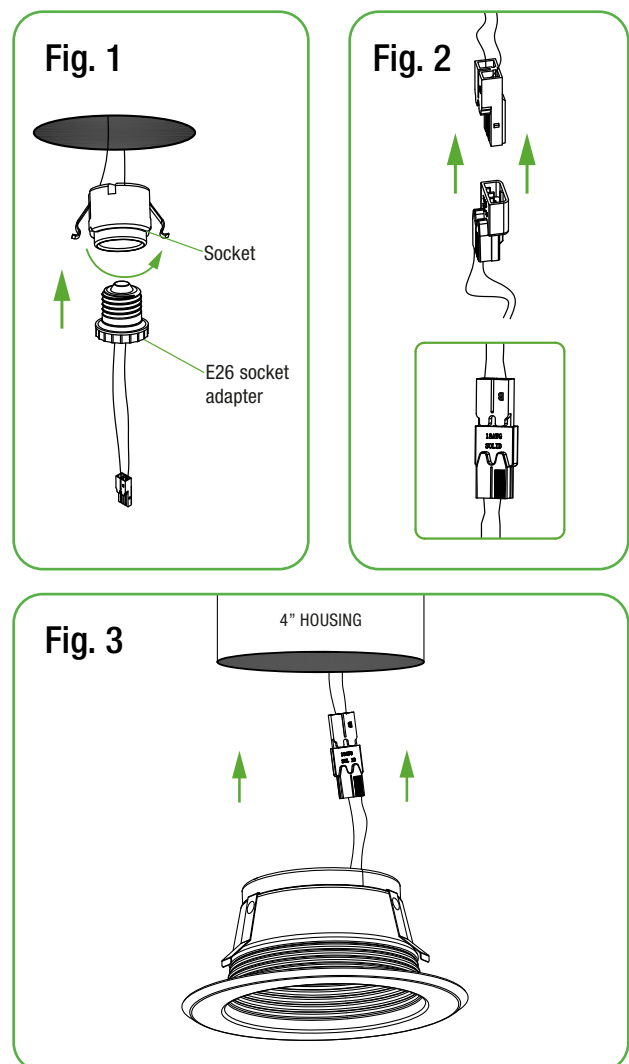

# Multipurpose Downlight Module

## INSTALLATION INSTRUCTIONS

### INSTALLATION FOR LED 6" GLI-MDM

#### STEP 1

Remove existing trim and CFL or incandescent bulbs.

#### STEP 2

Plug the female connector of the retrofit-kit onto the male connector of the socket adapter assembly. (Fig. 2)

(If you used E26 socket, please screw E26 socket adapter into socket in housing. ) (Fig. 1)

#### STEP 3

Squeeze the torsion springs (A) together as shown and install into torsion spring brackets (B) inside the housing. (Fig. 4)

#### STEP 4

Tuck all wiring into the housing and push the retrofit trim (C) up flush to ceiling surface. (Fig. 3)

Fig. 4

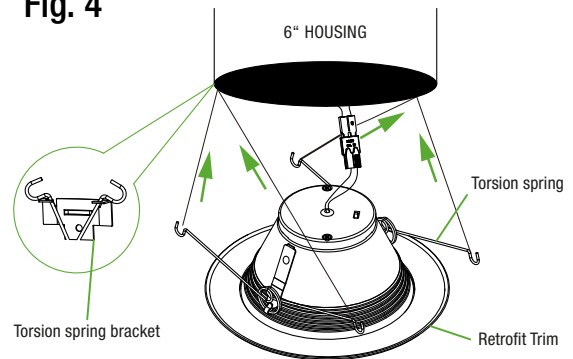


Fig. 5

