

Slim Flush Mount Disk

GLI-SFMD

INSTALL AND MAINTENANCE MANUAL

WARNING

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Turn off electrical power before installing or servicing luminaire in any way.
5. To reduce the risk of fire and overheating, make sure all connections are tight.



**May result in serious injury or death.
Turn power OFF at circuit breaker
prior to installation or servicing.**

Slim Flush Mount Disk

CAUTION

- Check input voltage before connecting the track system to avoid damage.
- The installation and removal of lamps require professional technical personnel to operate.
- Check for signs of damage when opening the package. If broken glass is found, reach out for replacement.
- Professional technical personnel is required to operate, install or remove the track system.
- To avoid electric shock, turn off all lighting fixtures when connected to the power supply.
- Use AC120 50/60Hz circuits.
- Suitable for damp locations.
- Reliable operating temperature is -20 to +40 degrees Celsius (-4 to +104 degrees Fahrenheit).
- DO NOT cover the fixture with any heat insulated materials.
- DO NOT alter the LED light source or driver inside under any circumstance.

INSTALLATION INSTRUCTIONS

PRE-INSTALLATION

Before beginning installation, turn OFF power from the electrical panel.


Take the fixture and components out of the package. In case of missing parts, do not assemble, install, or operate this light fixture.

1x LED Panel
1x Bracket
1x Anti-drop Thread
2x Screws


EMBEDDED INSTALLATION 4" CAN

STEP 1

Remove trim and existing lamp from recessed fixture.

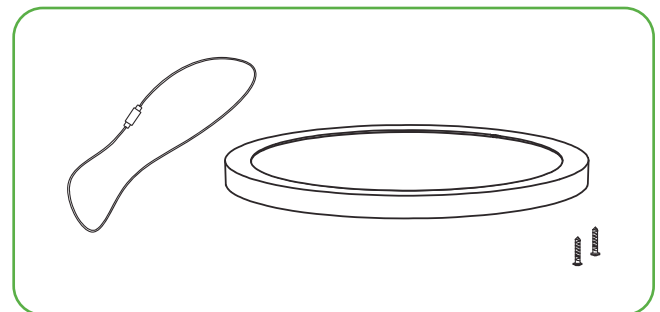

Step 1



Slim Flush Mount Disk

INSTALLATION INSTRUCTIONS

STEP 2

Screw E26 socket adapter into socket in the housing.

STEP 3

Press the friction blade to insert the lamp into the housing and restore power.

EMBEDDED INSTALLATION 5/6" CAN

STEP 1

Remove trim and existing lamp from recessed fixture.

STEP 2


Screw E26 socket adapter into socket in the housing.

STEP 3


Press the friction blade to insert the lamp into the housing and restore power.




Step 2




Step 3




Step 1



Step 2



Step 3



Slim Flush Mount Disk

INSTALLATION INSTRUCTIONS

SURFACE MOUNTED INSTALLATION

STEP 1

Screw the bracket on terminal box.

STEP 2


Connect the wires.

STEP 3


Attach the lamp body onto the bracket tightly.




Step 1

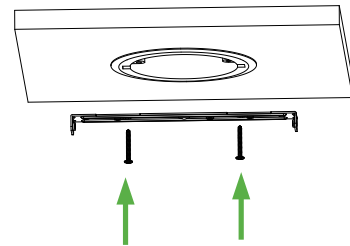

Step 2



Step 3



EASY TO CHANGE COLOR RING

Magnet inside.

Color options: Matte Black, Satin Nickel, Polished Chrome



Slim Flush Mount Disk

INSTALLATION INSTRUCTIONS

3CCT ADJUSTABLE SWITCH

3CCT DIP SWITCH
3000K 4000K 5000K

