

Wraparound Light B

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-WLLB

Wraparound Light B

GOLED Wraparound Light B is robustly built for indoor and outdoor hallways, parkades, stairwells and service areas. The optional sensor offers shutdown based on occupancy. This ensures excellent illumination and power savings without compromising safety.

Features and Specifications

- Rugged high efficiency linear light makes for a cost efficient utilitarian light
- 4ft and 8ft lengths available
- Available in 3000K, 4000K, 5000K and 3CCT select
- High lumen per watt output of 130LM/W
- Available for 120V-277V
- 0-10V dimming
- Surface or suspended installation
- Optional battery back-up
- Optional occupancy sensor

Certifications

- cULus Listed
- RoHS

Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours




Overview

Light source	LED
Watts (W)	20W to 80W
Voltage	120V-277V
Lumen output (LM)	5200LM 10400LM
Efficiency (LM/W)	130LM/W
Color temperature (K)	3000K, 4000K, 5000K
CRI	80CRI


Wraparound Light B

DIMENSIONS


8ft front view

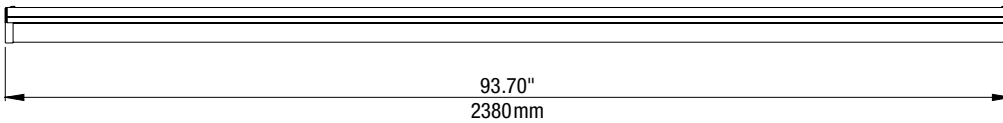


8ft side view



4ft front view

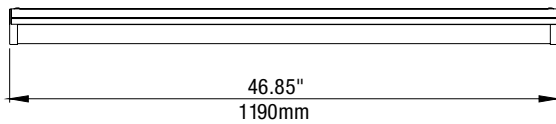

4ft side view



SPECIFICATIONS

CODE	WATTAGE	LUMENS	LUMENS/WATT	CCT	CRI	RATED LIFETIME
GLI-WLLB-4	40W	5200LM	130LM/W	30K/40K/50K	80CRI	50 000 hours
GLI-WLLB-8	80W	10400LM	130LM/W	30K/40K/50K	80CRI	50 000 hours

ORDERING GUIDE

SERIES	LENGTH/WATTAGE	CCT	CONTROL	BATTERY BACK-UP	MOUNTING
GLI-WLLB					
	4 - 4ft 40 Watts	30K - 3000K	NC - No control	NB - No battery	CS - Cable suspension
	8 - 8ft 80 Watts	40K - 4000K	DM - 0-10V	BB - Battery backup	SM - Surface
		50K - 5000K	OS - Occupancy sensor		
		3SK - 3CCT select			