

High Output Flood Lights A

GLI-HOFLA

INSTALL AND MAINTENANCE MANUAL

WARNING

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Turn off electrical power before installing or servicing luminaire in any way.
5. To reduce the risk of fire and overheating, make sure all connections are tight.



**May result in serious injury or death.
Turn power OFF at circuit breaker
prior to installation or servicing.**

WARNINGS AND CAUTIONS

- **Electrical Safety:** Disconnect power at the circuit breaker before installation or maintenance to avoid electric shock.
- **Qualified Personnel:** Installation must be performed by a licensed electrician in compliance with local codes.
- **Voltage Verification:** Ensure the supply voltage matches the fixture's specifications to prevent damage.
- **Secure Mounting:** Verify that the mounting surface or structure can support the weight of the fixture.
- **Wiring Precautions:** Ensure all wiring connections are properly insulated and secure to prevent hazards.
- **Heat Dissipation:** Ensure adequate clearance around the fixture to allow for proper heat dissipation and prevent overheating.
- **Environmental Conditions:** Suitable for both indoor and outdoor use. Ensure the installation environment is free of corrosive substances.
- **Avoid Exposure:** Do not install the fixture in areas prone to prolonged submersion or extreme environmental conditions unless specifically rated for such use.



CONTENTS

1. Install Glare Shield
2. Surface Bracket
3. Pole Bracket

GLI-HOFLA High Output Flood Lights A Installation Instructions

1 INSTALL GLARE SHIELD





- 1-1. Line up the shield holes with the fixture front of the heat sink
- 1-2. Install the screws 5x or 6x depending on light dimensions.

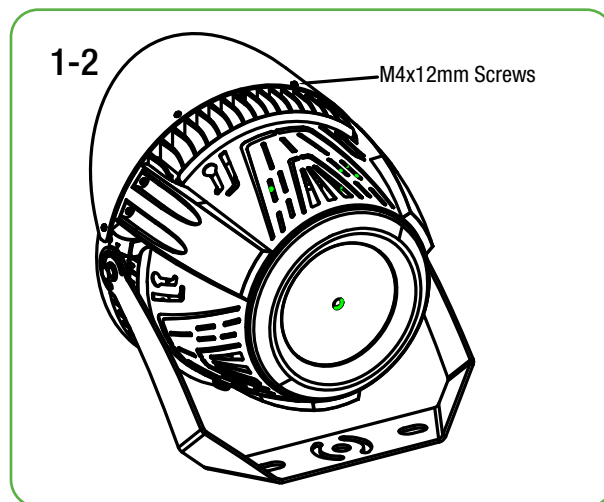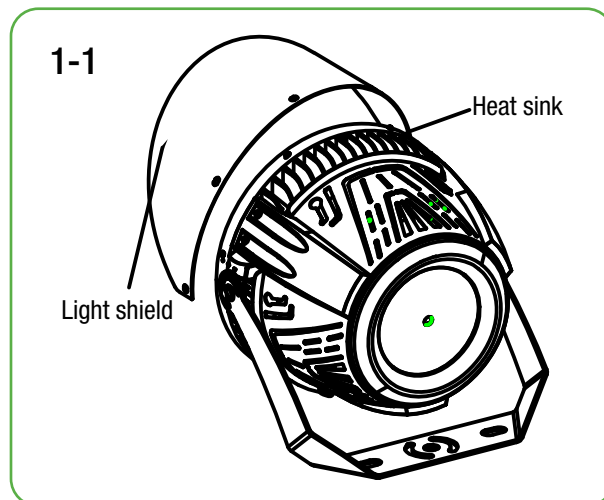

GLI-HOFLA High Output Flood Lights A Installation Instructions

2 SURFACE BRACKET

- 2-1. Install the mounting hardware according to the desired installation type (fixed or adjustable).
- 2-2. Place the fixture onto the mounting hardware and secure it with nuts.
- 2-3. Adjust the horizontal angle of the fixture and tighten all nuts securely.
- 2-4. Loosen the screws on the side of the fixture that attach it to the bracket to adjust the vertical angle.
- 2-5. Set the desired vertical angle and tighten the screws securely.
- 2-6. Connect the fixture wires as follows, ensuring all connections are waterproof:
 - **Black:** Live/Hot
 - **White:** Neutral
 - **Green:** Ground

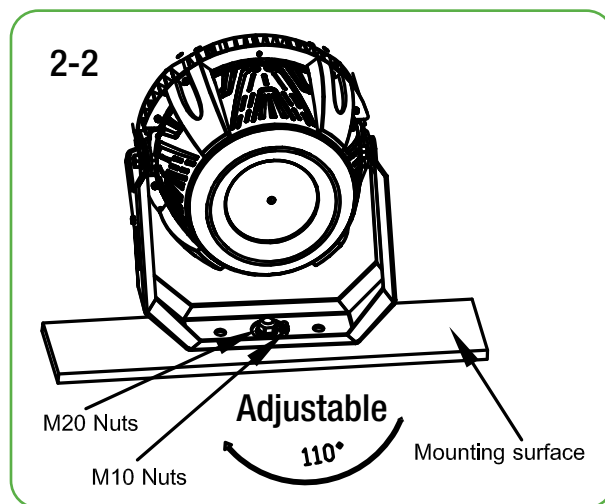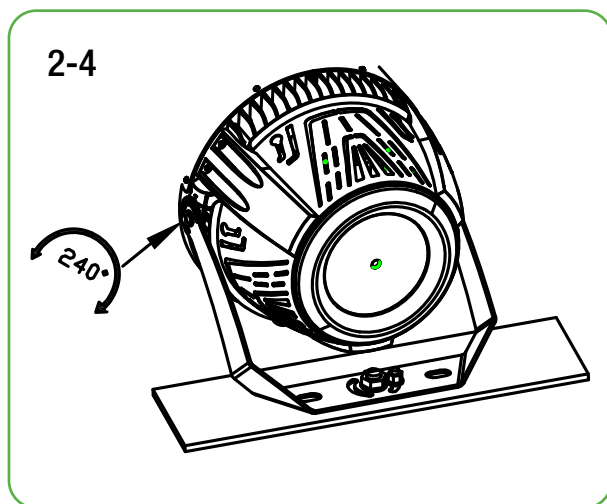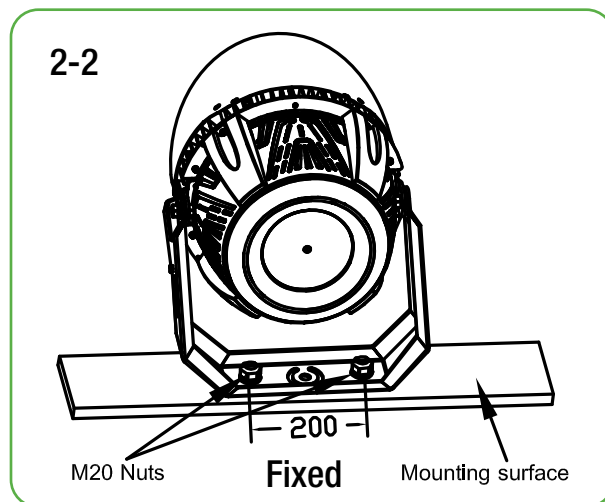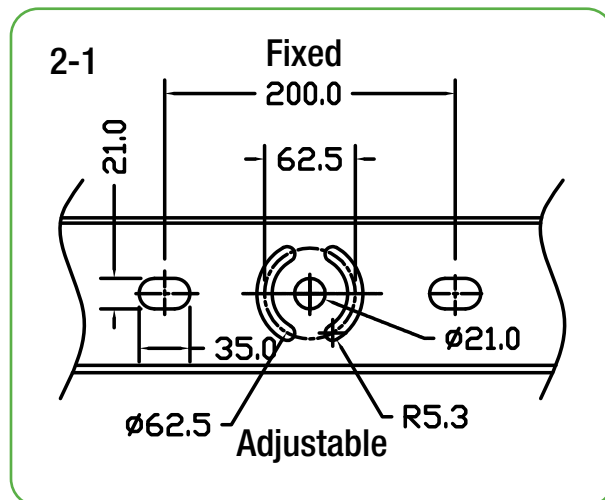


GLI-HOFLA High Output Flood Lights A Installation Instructions


3 POLE BRACKET

- 3-1. Bolt the fixture's surface bracket to the pole bracket.
- 3-2. Place the assembly onto the pole.
- 3-3. Adjust the horizontal angle of the fixture and tighten all screws securely.
- 3-4. Loosen the knuckle screw to adjust the vertical angle, then tighten it securely.
- 3-5. Connect the fixture wires as follows, ensuring all connections are waterproof:
 - **Black:** Live/Hot
 - **White:** Neutral
 - **Green:** Ground

3-1

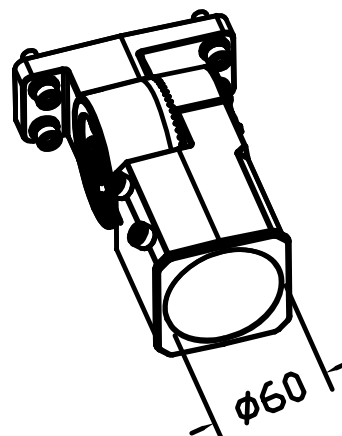

3-2

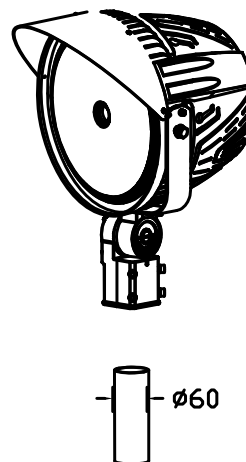

3-4

