

Step Light Recessed

GLI-SLRA

INSTALL AND MAINTENANCE MANUAL

WARNING

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Turn off electrical power before installing or servicing luminaire in any way.
5. To reduce the risk of fire and overheating, make sure all connections are tight.



**May result in serious injury or death.
Turn power OFF at circuit breaker
prior to installation or servicing.**

WARNINGS AND CAUTIONS

- **Electrical Safety:** Disconnect power at the circuit breaker before installation or maintenance to avoid electric shock.
- **Qualified Personnel:** Installation must be performed by a licensed electrician in compliance with local codes.
- **Voltage Verification:** Ensure the supply voltage matches the fixture's specifications to prevent damage.
- **Secure Mounting:** Verify that the mounting surface or structure can support the weight of the fixture.
- **Wiring Precautions:** Ensure all wiring connections are properly insulated and secure to prevent hazards.
- **Heat Dissipation:** Ensure adequate clearance around the fixture to allow for proper heat dissipation and prevent overheating.
- **Environmental Conditions:** Suitable for both indoor and outdoor use. Ensure the installation environment is free of corrosive substances.



CONTENTS

1. 2205 2207 2209 2301 Installation
2. 2006 Installation
3. 2155 Installation
4. 2165 Installation

GLI-SLRA Step Light Recessed Installation Instructions

1 2205 2207 2209 2301 INSTALLATION




- 1-1. Run power cable to the installation box location.
- 1-2. Embed the installation box into the wall and secure it in place.
- 1-3. Install the finishing surface around the installation box, ensuring a flush fit.
- 1-4. Connect the fixture power cable as follows, ensuring all connections are waterproof
 - **Black:** Live/Hot
 - **White:** Neutral
 - **Green:** Ground
- 1-5. Align the clip on the housing with the clip inside the installation box, then press the fixture in until the clips lock securely.

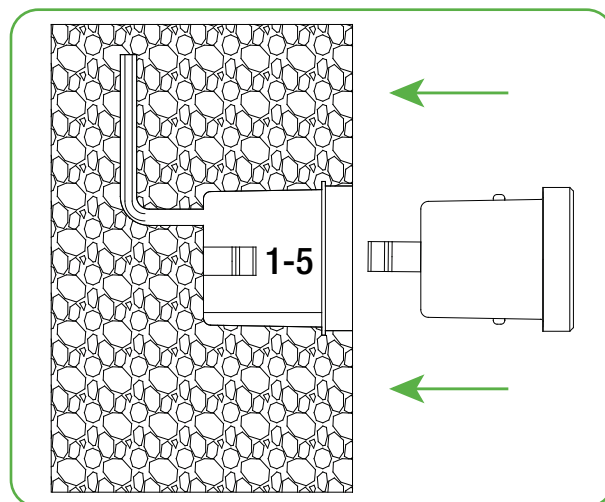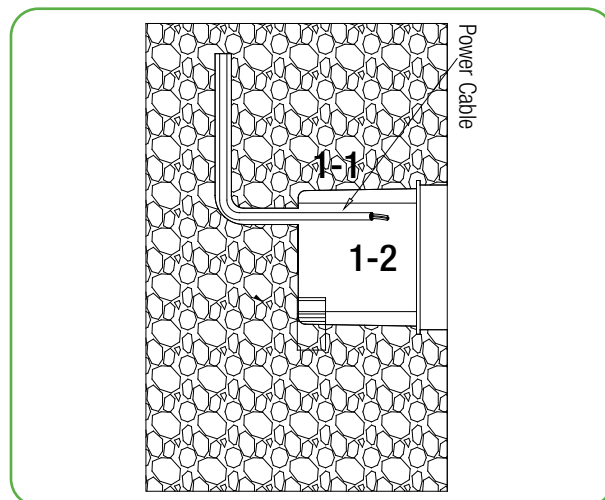

GLI-SLRA Step Light Recessed Installation Instructions

2 2006 INSTALLATION




- 2-1. Run power cable to the installation box location.
- 2-2. Embed the installation box into the wall and secure it in place.
- 2-3. Install the finishing surface around the installation box, ensuring a flush fit.
- 2-4. Remove the faceplate from the fixture by unscrewing the two hex screws.
- 2-5. Connect the fixture power cable as follows, ensuring all connections are waterproof
 - **Black:** Live/Hot
 - **White:** Neutral
 - **Green:** Ground
- 2-6. Place the fixture over the installation box, aligning the fixture holes with the box tabs.
- 2-7. Insert and tighten the screws to secure the fixture to the installation box.
- 2-8. Position the faceplate over the fixture and align the holes.
- 2-9. Insert the screws and tighten them securely to fasten the faceplate.

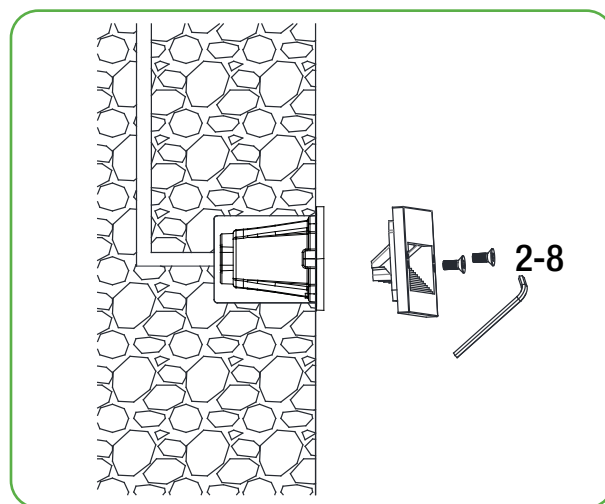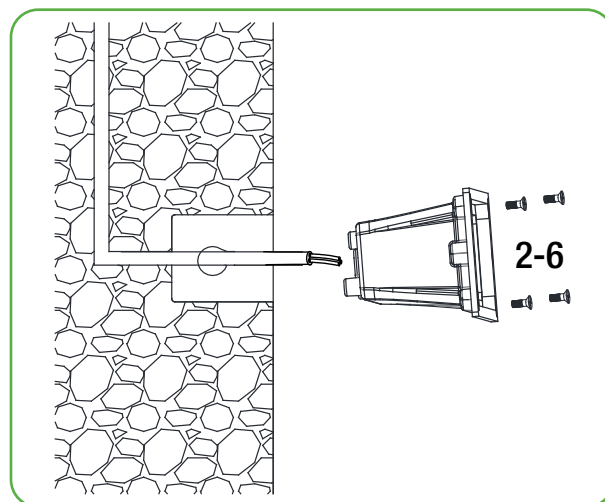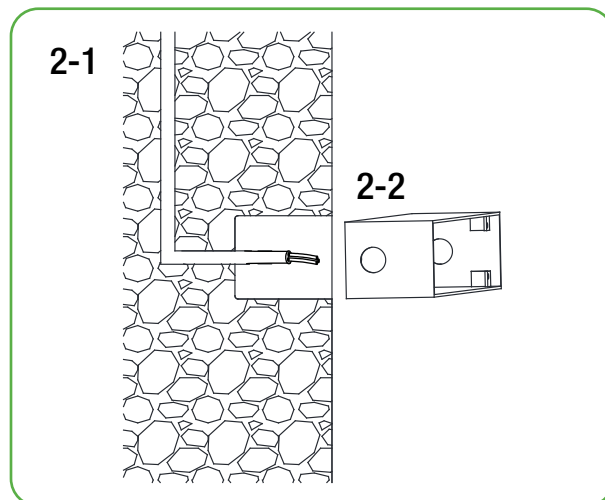

GLI-SLRA Step Light Recessed Installation Instructions

3 2155 INSTALLATION

- 3-1. Run power cable to the installation box location.
- 3-2. With the knockout facing right, embed the installation box into the wall and secure it in place.
- 3-3. Install the finishing surface around the installation box, ensuring a flush fit.
- 3-4. Connect the fixture power cable as follows, ensuring all connections are waterproof
 - **Black:** Live/Hot
 - **White:** Neutral
 - **Green:** Ground
- 3-5. Align the clip on the housing with the clip inside the installation box, then press the fixture in until the clips lock securely.

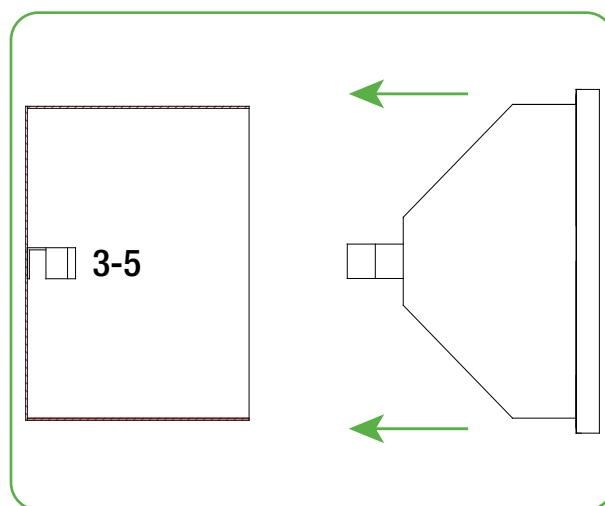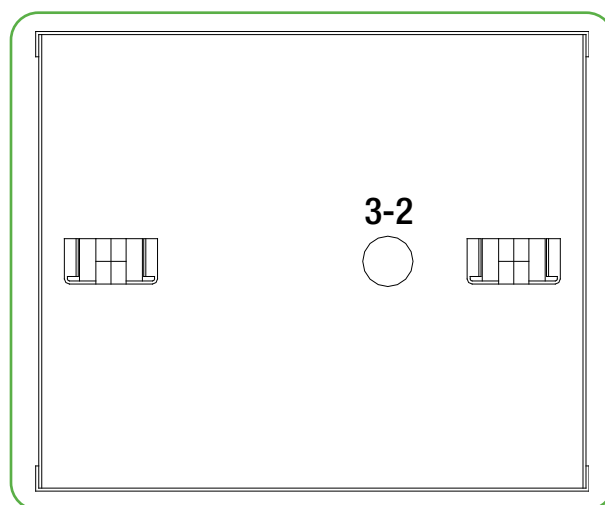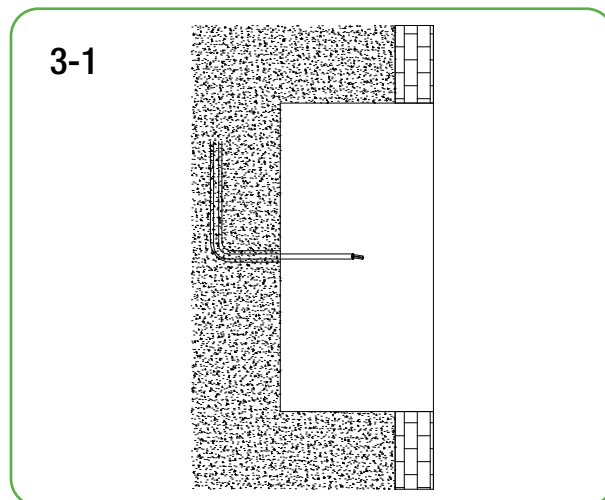

GLI-SLRA Step Light Recessed Installation Instructions

4 2165 INSTALLATION

- 4-1. Run power cable to the installation box location.
- 4-2. With the single clip facing up and the two clips at the bottom, embed the installation box into the wall and secure it in place.
- 4-3. Install the finishing surface around the installation box, ensuring a flush fit.
- 4-4. Remove the faceplate from the fixture by unscrewing the four screws.
- 4-5. Connect the fixture power cable as follows, ensuring all connections are waterproof
 - **Black:** Live/Hot
 - **White:** Neutral
 - **Green:** Ground
- 4-6. Place the fixture over the installation box, aligning the fixture holes with the box clips.
- 4-7. Insert and tighten the screws to secure the fixture to the installation box.
- 4-8. Position the faceplate over the fixture and align the holes.
- 4-9. Insert the screws and tighten them securely to fasten the faceplate.

