

# Universal mount cylinder light A

Project: \_\_\_\_\_ Location: \_\_\_\_\_ Type: \_\_\_\_\_  
Model Number: \_\_\_\_\_ Qty: \_\_\_\_\_ Notes: \_\_\_\_\_ Date: \_\_\_\_\_



## GLI-UMCLA

### Universal mount cylinder light A

The GoLED Universal mount cylinder light A combines elegant aesthetics and durability in one energy efficient and versatile light fixture.

### Features and Specifications


- High quality extruded aluminum housing
- Can be installed as a surface light or pendant light
- Available in 24W(1662LM), and 40W(4303LM)
- Multiple beam angles available from narrow beam 8°, to wide angle 62°
- Finish: black, white, gray, silver, mineral bronze
- 70LM/W/108LM/W luminous efficacy
- Optimal color rendering capability: 80CRI
- 0-10V dimming optional

### Certifications

- cULus Listed
- IP65 water ingress rating

### Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours

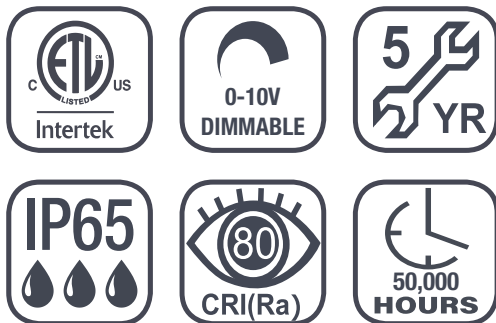


### Overview

|                       |                            |
|-----------------------|----------------------------|
| Light source          | LED                        |
| Watts (W)             | 24W, 40W                   |
| Voltage               | 120V-277V                  |
| Lumen output (LM)     | 1662LM, 4303LM             |
| Color temperature (K) | 3000K, 4000K, 5000K, 6000K |
| CRI                   | 80CRI                      |

## Universal mount cylinder light A

### DIMENSIONS

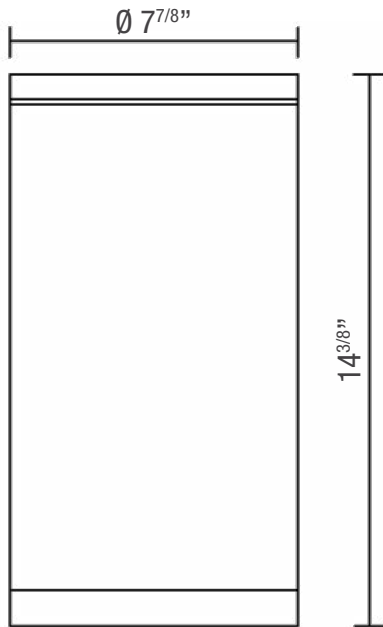

### SPECIFICATIONS

| CODE         | WATTAGE | LUMENS | LUMENS/WATT | CCT   | CRI   | RATED LIFETIME |
|--------------|---------|--------|-------------|-------|-------|----------------|
| GLI-UMCLA-24 | 24W     | 1662LM | 70LM/W      | 4000K | 80CRI | 50 000 hours   |
| GLI-UMCLA-40 | 40W     | 4303LM | 108LM/W     |       | 80CRI | 50 000 hours   |

### ORDERING GUIDE

| SERIES    | WATTAGE              | BEAM            | CCT                | FINISH                     | INSTALLATION           | OPTIONS                                        |
|-----------|----------------------|-----------------|--------------------|----------------------------|------------------------|------------------------------------------------|
| GLI-UMCLA |                      |                 |                    |                            |                        | APPEND REQUIRED CODES                          |
|           | <b>24</b> - 24 Watts | <b>15</b> - 15° | <b>30K</b> - 3000K | <b>BK</b> - Black          | <b>CI</b> - 3' pendant | <b>DM</b> - 0-10V Dimming                      |
|           |                      | <b>25</b> - 25° | <b>40K</b> - 4000K | <b>WH</b> - White          | <b>SI</b> - Surface    | <b>M</b> - Marine ambient corrosion resistance |
|           |                      | <b>38</b> - 38° | <b>60K</b> - 6000K | <b>GR</b> - Gray           |                        |                                                |
|           |                      | <b>45</b> - 45° |                    | <b>SI</b> - Silver         |                        |                                                |
|           |                      | <b>60</b> - 60° |                    | <b>MB</b> - Mineral Bronze |                        |                                                |
|           | <b>40</b> - 40 Watts | <b>8</b> - 8°   | <b>30K</b> - 3000K |                            |                        |                                                |
|           |                      | <b>18</b> - 18° | <b>40K</b> - 4000K |                            |                        |                                                |
|           |                      | <b>36</b> - 36° | <b>50K</b> - 5000K |                            |                        |                                                |
|           |                      | <b>62</b> - 62° |                    |                            |                        |                                                |