

Vanity Light

GLI-VLGS

INSTALL AND MAINTENANCE MANUAL

WARNING

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Turn off electrical power before installing or servicing luminaire in any way.
5. To reduce the risk of fire and overheating, make sure all connections are tight.






**May result in serious injury or death.
Turn power OFF at circuit breaker
prior to installation or servicing.**

Vanity Light

CAUTION

- Check input voltage before connecting the lamp to avoid damage.
- The installation and removal of lamps require professional technical personnel to operate.
- Check for signs of damage when opening the package. If broken glass is found, reach out for replacement.
- Professional technical personnel is required to operate, install or remove the fixtures.
- To avoid electric shock, turn off all lighting fixtures and remove fuse from the fuse box before installation or servicing.
- This fixture is for 120-Volt AC 60Hz.

ACCESSORIES

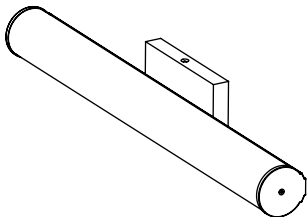CODE	A	AA	DD	EE
PICTURE				
DESCRIPTION	Fixture	Mounting plate	Screw	Wire Connector

INSTALLATION INSTRUCTIONS

PRE-INSTALLATION

Take the fixture and components out of the package.

- A** Fixture
AA Mounting plate
DD Screw
EE Wire Connector

In case of missing parts, do not assemble, install, or operate this light fixture.

Before beginning installation, turn OFF power from the electrical panel and remove fuse from the fuse box to avoid electrical shock.

Vanity Light

INSTALLATION INSTRUCTIONS

INSTALLATION

STEP 1

Detach the 3 fixture screws and mounting plate from back of fixture. (Fig. 1)

STEP 2

Use 2 screws to install the mounting plate to the wall. Ensure that the mounting plate is level on the wall using a level (not included). (Fig. 2)

STEP 3

See Fig. 3.

Connect white wire(s) from the fixture to the white (neutral) wire of the supply circuit and screw on a wire connector.

Connect the black wire(s) from the fixture to the black (live) wire of the supply circuit and screw on a wire connector.

Connect the green wire(s) or copper wire(s) from the fixture to the ground wire and screw on a wire connector.

STEP 4

Attach fixture onto mounting plate by sliding it on. Ensure that the screw holes on the fixture and screw holes on mounting plate are aligned. Use 3 screws to install the fixture. (Fig. 4)

WARNING: The LED bulb is a long lasting bulb does not need to be replaced. Do not attempt to replace the LED bulb. If the bulb is not working, recheck wiring and installation. If all wiring is correct and the fixture still does not work, the fixture must be replaced.

CARE AND CLEANING

Shut off main power supply before wiping product with damp cloth or window cleaner. Do not use abrasives.

Fig. 1

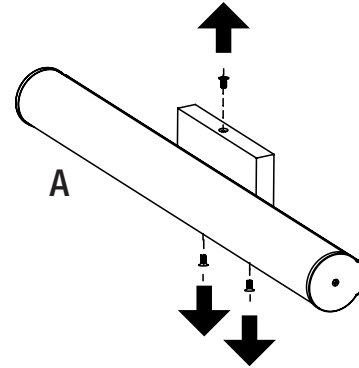


Fig. 2

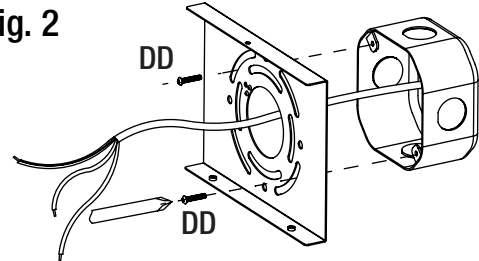


Fig. 3

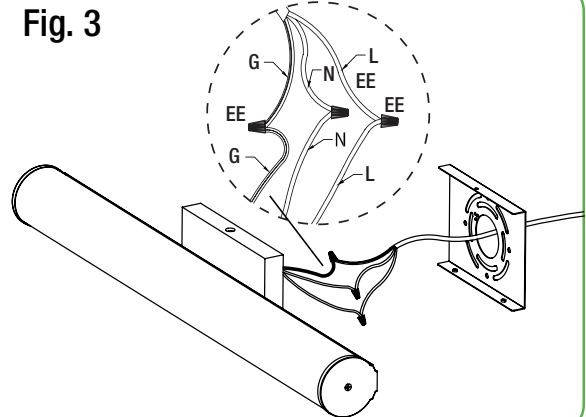


Fig. 4

