

Wraparound Linear Light H

GLI-WLLH

INSTALL AND MAINTENANCE MANUAL

WARNING

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Turn off electrical power before installing or servicing luminaire in any way.
5. To reduce the risk of fire and overheating, make sure all connections are tight.



**May result in serious injury or death.
Turn power OFF at circuit breaker
prior to installation or servicing.**

Wraparound Linear Light H

CAUTION

- Before connecting the light, verify that the input voltage is compatible to prevent damage.
- Carefully check for any signs of damage upon opening the package.
- Before connecting to the power supply, switch off the breaker and verify that it is off to prevent electric shock.
- To prevent damage, avoid exposing wiring to sharp edges or objects.
- For safety standard, please do not connect more than 4 pcs 4ft LED lamp in a row; do not connect more than 3 pcs 8ft LED lamp in a row.

COMPONENTS


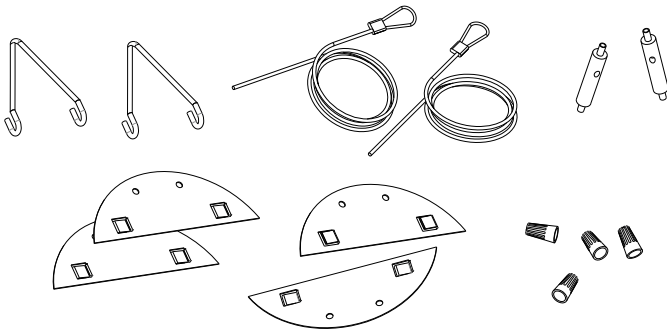


Fig. 1

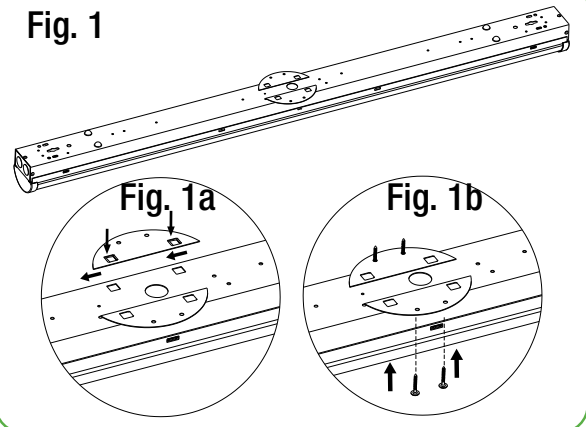

INSTALLATION INSTRUCTIONS

OCTAGON JUNCTION BOX INSTALLATION

1. Slide accessory octagon plates into the grooves of the fixture body. (Fig. 1a)
2. Secure the octagon accessory plates to the fixture by tightening the four retaining screws. (Fig. 1b)
3. Attach the fixture to the octagon junction box.

DIRECT SURFACE INSTALLATION

1. Squeeze the fixture body near the tabs to release and remove the lens. (Fig. 2)
2. Secure the fixture body to mounting location using suitable fasteners. (Fig. 3)

Fig. 2


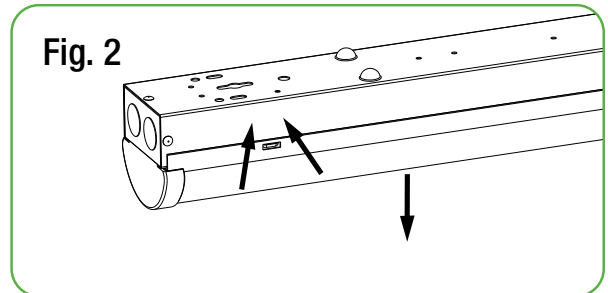


Fig. 3



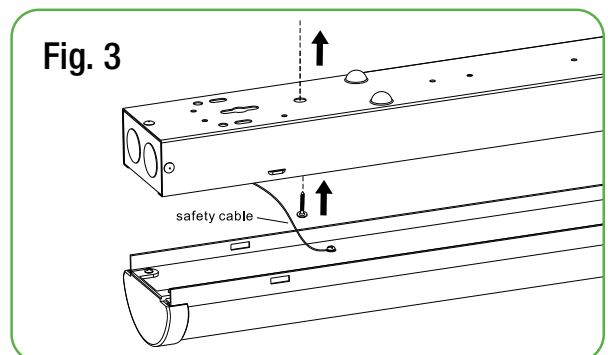


Wraparound Linear Light H

INSTALLATION INSTRUCTIONS




SUSPENSION INSTALLATION

1. Identify a sturdy position from which to suspend the light. Loop the suspension wire around this point. (Fig. 4)
2. Securely connect hooks to the holes in the luminaire. (Fig. 5 & 6)

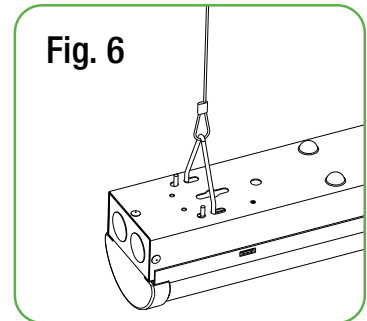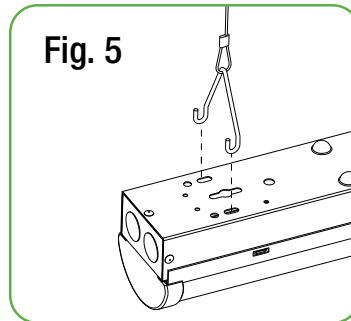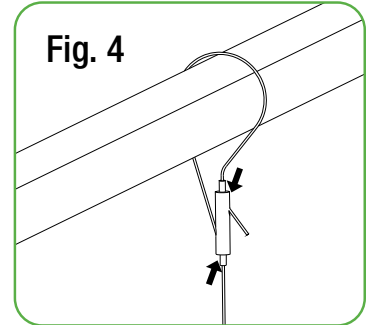


INTERCONNECTION INSTALLATION

1. Squeeze the fixture body near the tabs to release and remove the lens (Fig. 2)
2. Attach the linking bracket to both lights securely (Fig. 7 & 8)
3. Wire lights together for interconnection. (Fig. 9)

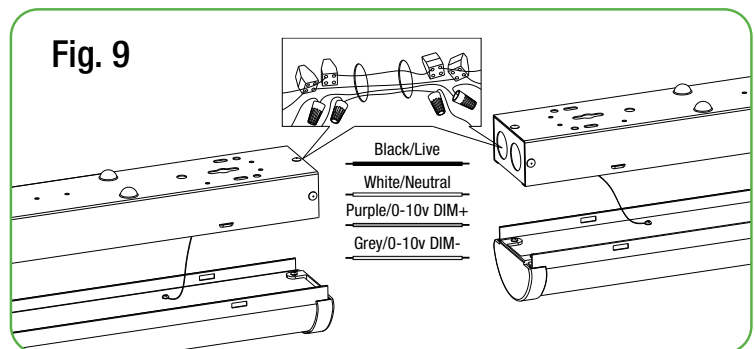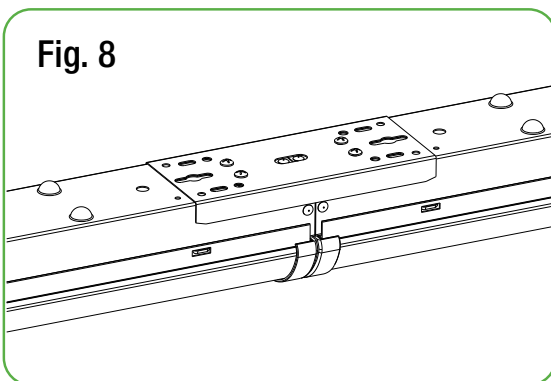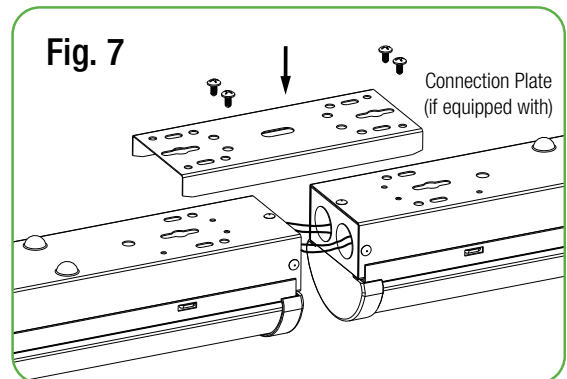

NOTE: For safety standard, please do not connect more than 4pcs 4ft LED lamp in a row; do not connect more than 3 pcs 8ft LED lamp in a row.

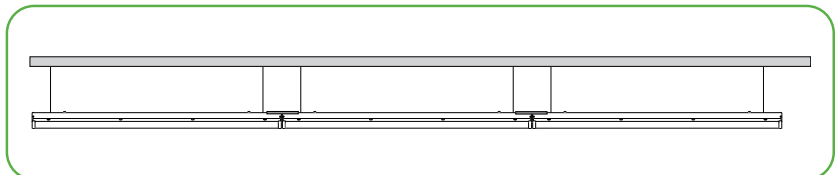

Wraparound Linear Light H

INSTALLATION INSTRUCTIONS

WIRING GUIDE

1. Wire according to diagram. (Fig. 10)

ADJUSTABLE CCT AND ADJUSTABLE WATT

1. If available use the switch to adjust to the needed Watt and CCT. (Fig. 11a & 11b)

Fig. 10

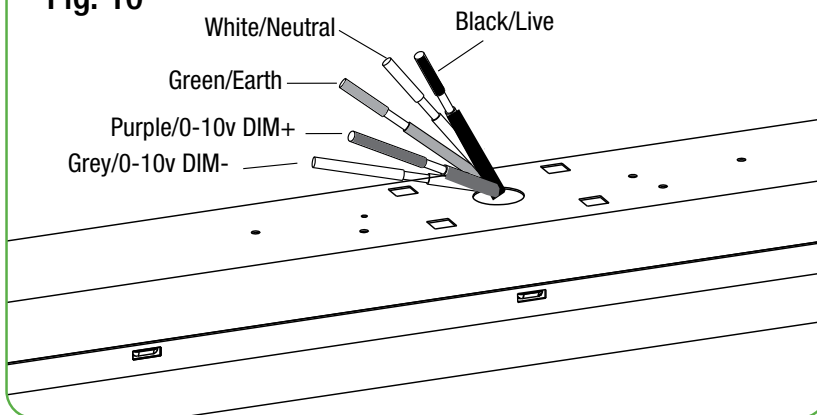


Fig. 11a

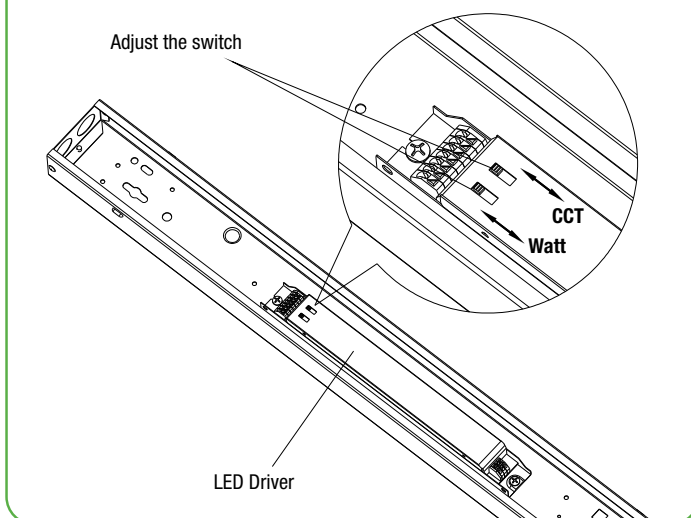


Fig. 11b

