


Wall Pack Light B

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____

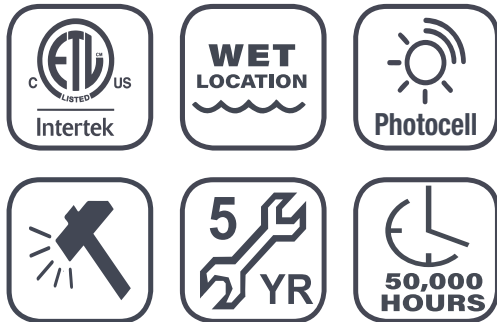

Overview

Light source	LED
Watts (W)	15W, 25W, 35W, 45W, 55W
Voltage	120V-277V
Lumen output (LM)	1950LM, 3250LM, 4550LM, 5850LM, 7150LM
Efficiency (LM/W)	130LM/W
Color temperature (K)	3000K, 4000K, 5000K
CRI	70 CRI or 80 CRI

GLI-WPLB

Wall Pack Light B

GOLED Wall Pack Light B comprises a tough integrated LED design ensuring a long-lasting life and eliminating the need for costly maintenance. GLI-WPLB gives the option of multiple wattages to suit various illumination needs. Color temperatures such as cool, natural, and warm white. With ideal lighting and reliability, safety is enhanced and accidents can be avoided.

Features and Construction

- Heavy duty aluminum housing
- Impact resistant polycarbonate lens
- Durable powder coated finish
- Housing enhances cooling for extended lifetime and stable operation
- Suitable for use in a wide range of environmental zones where control of nuisance glare is critical.
- Diffuser optic design delivers non-dazzling lighting distribution, maximizing spacings between luminaires whilst minimizing light pollution
- Designed to be easily installed, saving time and cost
- Operating voltage 120V-277V
- Choice of 15W(1950LM), 25W(3250LM), 35W(4550LM), 45W(5850LM), 55W(7150LM)
- Selectable power output of 30%, 50%, 75% and 100%
- CCT selectable 3000K, 4000K and 5000K
- Low operating cost with high efficiency output of 130LM/W
- 70 CRI or 80 CRI
- Optional light sensor
- Optional 3W battery back-up providing emergency light for 3 hours

Certifications


- cETLus Listed
- IK10 impact rating
- IP66 wet location rated

Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours


Wall Pack Light B

DIMENSIONS

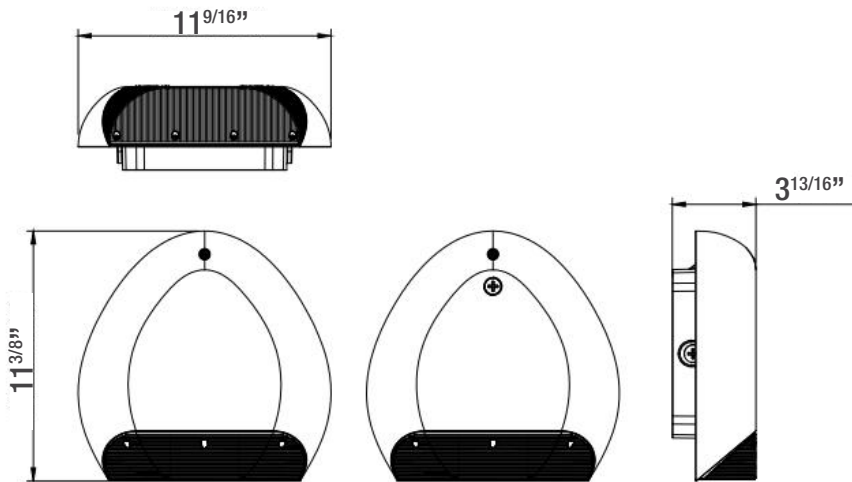

PHOTOMETRY

U00C04

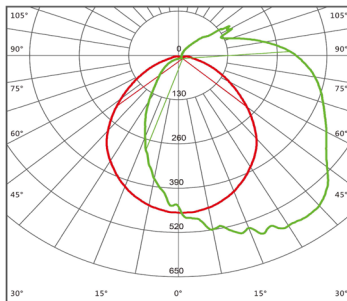

SPECIFICATIONS

MODEL	WATTAGE	LUMENS@100%	LUMENS@75%	LUMENS@50%	LUMENS@30%	LUMENS/WATT	CCT	CRI
GLI-WPLB-15	15W	1950LM	1463LM	975LM	585LM	130LM/W	3000K 4000K 5000K	70CRI
GLI-WPLB-25	25W	3250LM	2438LM	1625LM	975LM	130LM/W		70CRI
GLI-WPLB-35	35W	4550LM	3413LM	2275LM	1365LM	130LM/W		70CRI
GLI-WPLB-45	45W	5850LM	4388LM	2925LM	1755LM	130LM/W		70CRI
GLI-WPLB-55	55W	7150LM	5363LM	3575LM	2145LM	130LM/W		70CRI

ORDERING GUIDE

SERIES	WATTAGE	CCT	CRI	CONTROL	BATTERY BACK-UP
GLI-WPLB					
	15 - 15 Watts	30K - 3000K	70C - 70CRI	NC - No control	NB - No battery
	25 - 25 Watts	40K - 4000K	80C - 80CRI	DS - Daylight sensor	BB - Battery backup
	35 - 35 Watts	50K - 5000K		DM - 0-10V Dimming	
	45 - 45 Watts	3SK - 3CCT select			
	55 - 55 Watts				