

LED 4" Fixed Recessed Downlight

Project: _____ Location: _____ Type: _____
Model Number: _____ Qty: _____ Notes: _____ Date: _____



Overview

Light source	LED
Watts (W)	15W, 22W
Voltage	120V, 120-347V
Lumen output (LM)	1140-1320LM, 1805-2085LM
Efficiency (LM/W)	76-88LM/W, 82-95LM/W
Color temperature (K)	2700/3000/3500/4000/5000
CRI	90CRI, 97CRI

GLI-FRD4

LED 4" Fixed Recessed Downlight

The GOLED Fixed Recessed Downlight series construction provides a pleasant downlight solution in a package that minimizes installation labour. With quick install spring clips and a one-piece reflector and trim the installation is virtually reduced to a snap-in.

Features and Specifications

- 15W (1140-1320LM), 22W (1805-2085LM)
- Available with 5 field selectable CCTs (2700/3000/3500/4000/5000)
- Highly durable die-cast aluminum body provides effective cooling
- Spring mounting clips ensure a centered, gapless installation by securely snapping the product in place
- New construction rough in plates available
- No housing required
- Standard FT1 rated cable, FT4 or FT6 rated cable optional
- Input voltage: AC 120V 50/60 Hz, AC 120-347V 50/60 Hz
- Quick and simple installation process
- TRIAC/ELV Dimmable (10% to 100%), optional 0-10V dimming

Certifications

- cETLus Classified
- Wet location rated
- I.c. rated for direct contact with insulation


Warranty

- 5 years warranty
- Lifespan(LM70) of over 50 000 hours


LED 4" Fixed Recessed Downlight

DIMENSIONS


4" 15W Round

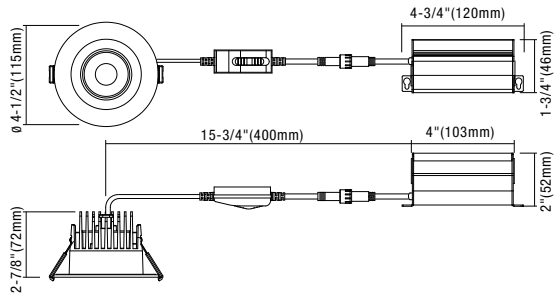


4" 15W Square

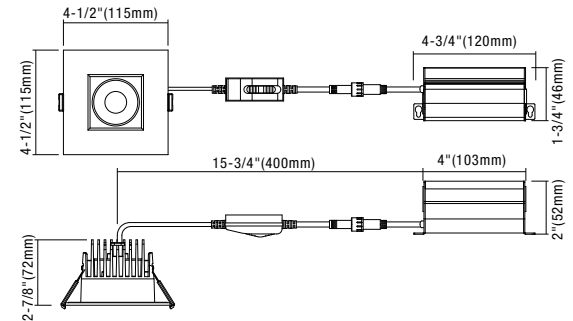



4" 15W Round

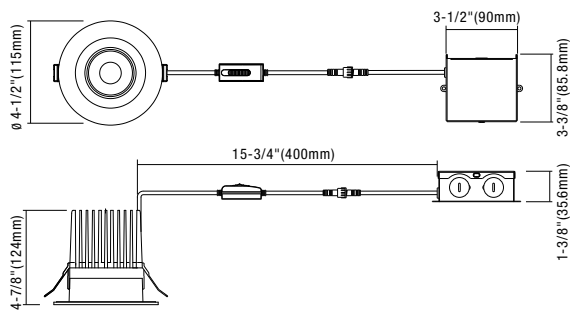

4" 15W Square

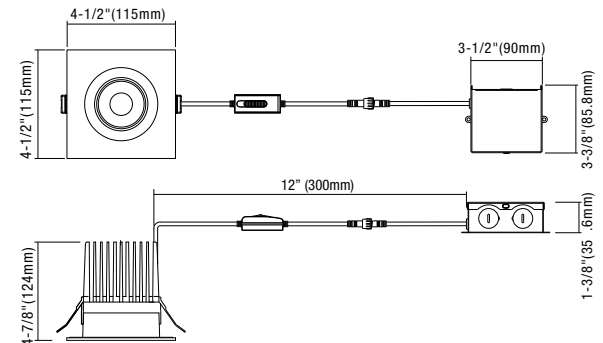

Rough-in Frames



UNV

Multi-size: 2.5", 4" and 6" new construction rough-in plate with collar for use with universal LED module

LED 4" Fixed Recessed Downlight

SPECIFICATIONS

MODEL	WATTAGE	LUMENS	EFFICIENCY	CCT	CRI	RATED LIFETIME
GLI-FRD4-15W-5SK	15W	1140-1320LM	76-88LM/W	2700/3000/3500/4000/5000	90CRI	50 000 hours
GLI-FRD4-22W-5SK	22W	1805-2085LM	82-95LM/W	2700/3000/3500/4000/5000	90CRI	50 000 hours

ORDERING GUIDE

SERIES	WATTAGE	CCT	CRI	VOLTAGE	REFLECTOR/TRIM	FINISH
GLI-FRD4						
	15 - 15 Watts	5SK - 5 CCT Selectable 2700/3000/3500/4000/5000	90 - 90 CRI	V1 - 120V	RS - Round Smooth Reflector	WH - Matte White
	22 - 22 Watts		97¹ - 97 CRI	V2 - 120-347V	RB - Round Baffled Reflector	BK - Matte Black
					SS - Square Smooth Reflector	BZ¹ - Bronze
					SB - Square Baffled Reflector	BN¹ - Brushed Nickel

CONTROL	CABLE	ROUGH-IN FRAME	ACCESSORIES
		APPEND REQUIRED CODES	APPEND REQUIRED CODES
TR - TRIAC compatible	FT1 - FT1 Luminaire cable	UNV - Universal Rough-In Frame	F106 - 6' extension cable
LV - 0-10V compatible	FT4¹ - FT4 Luminaire cable		F110 - 10' extension cable
	FT6¹ - FT6 Luminaire cable		F120 - 20' extension cable

(1)Subject to minimum order quantity