

LED 6" Fixed Recessed Downlight

Project: _____ Location: _____ Type: _____
Model Number: _____ Qty: _____ Notes: _____ Date: _____



Overview

Light source	LED
Efficiency (LM/W)	24W
Voltage	120V
Lumen output (LM)	1950LM
Efficiency (LM/W)	81LM/W
Color temperature (K)	2700/3000/3500/4000/5000
CRI	90CRI, 97CRI

GLI-FRD6

LED 6" Fixed Recessed Downlight

The GOLED Fixed Recessed Downlight series construction provides a pleasant downlight solution in a package that minimizes installation labour. With quick install spring clips and a one-piece reflector and trim the installation is virtually reduced to a snap-in.

Features and Specifications

- 24W 1950LM
- Available with 5 field selectable CCTs (2700/3000/3500/4000/5000)
- Highly durable die-cast aluminum body provides effective cooling
- Spring mounting clips ensure a centered, gapless installation by securely snapping the product in place
- New construction rough in plates available
- No housing required
- Standard FT1 rated driver cable, FT4 and FT6 rated cable optional
- Input voltage: AC 120V 50/60 Hz
- Quick and simple installation process
- TRIAC/ELV Dimmable (10% to 100%)

Certifications

- cETLus Classified
- Wet location rated
- I.c. rated for direct contact with insulation



Warranty

- 5 years warranty
- Lifespan(LM70) of over 50 000 hours



LED 6" Fixed Recessed Downlight

DIMENSIONS



6" Round

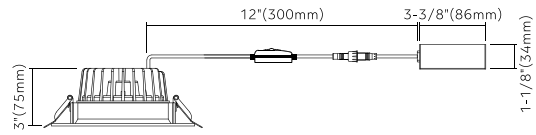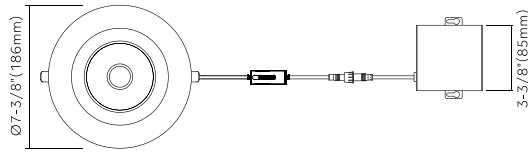

6" Square

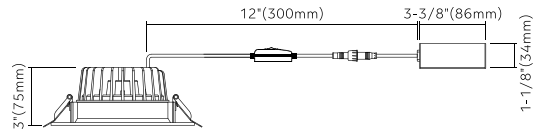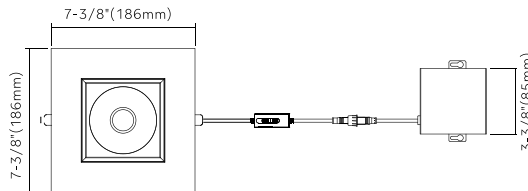

Rough-in Frames



UNV

Multi-size: 2.5", 4" and 6" new construction rough-in plate with collar for use with universal LED module

LED 6" Fixed Recessed Downlight

SPECIFICATIONS

MODEL	WATTAGE	LUMENS	EFFICIENCY	CCT	CRI	RATED LIFETIME
GLI-FRD6-24W-5SK	24W	1950LM	81LM/W	2700/3000/3500/4000/5000	90CRI	50 000 hours

ORDERING GUIDE

SERIES	WATTAGE	CCT	CRI	DRIVER	REFLECTOR/TRIM	FINISH
GLI-FRD6	24 - 24 Watts	5SK - 5 CCT Selectable 2700/3000/3500/4000/5000	90 - 90 CRI 97¹ - 97 CRI	V1 - 120V	RS - Round Smooth Reflector SS - Square Smooth Reflector	WH - Matte White BK - Matte Black BZ¹ - Bronze BN¹ - Brushed Nickel

CABLE	ROUGH-IN FRAME	ACCESSORIES
	APPEND REQUIRED CODES	APPEND REQUIRED CODES
FT1 - FT1 Luminaire cable	UNV - Universal Rough-In Frame	F106 - 6' extension cable
FT4¹ - FT4 Luminaire cable		F110 - 10' extension cable
FT6¹ - FT6 Luminaire cable		F120 - 20' extension cable

NOTES

(1) Subject to minimum order quantity