

# LED 3" Gimbal Flush Downlight

Project: \_\_\_\_\_ Location: \_\_\_\_\_ Type: \_\_\_\_\_  
Model Number: \_\_\_\_\_ Qty: \_\_\_\_\_ Notes: \_\_\_\_\_ Date: \_\_\_\_\_



## GLI-GFD3

### LED 3" Gimbal Flush Downlight

The GOLED Gimbal Flush Downlight series construction provides a versatile downlight that rotates and tilts to provide light and accent where required. Carefully engineered package minimizes installation labour. With quick install spring clips the installation is virtually reduced to a snap-in.

#### Features and Specifications


- 30° tilt and 360° rotation provides unparalleled freedom of movement
- Available with 5 field selectable CCTs (2700/3000/3500/4000/5000)
- Highly durable die-cast aluminum body provides effective cooling
- Spring mounting clips ensure a centered, gapless installation by securely snapping the product in place
- New construction rough in plates available
- No housing required
- Standard FT1 rated driver cable, FT4 and FT6 rated cable optional
- Input voltage: AC 120V 50/60 Hz
- Quick and simple installation process
- TRIAC/ELV Dimmable (10% to 100%)

#### Certifications

- cETLus Classified
- Wet location rated
- I.c. rated for direct contact with insulation

#### Warranty

- 5 years warranty
- Lifespan(LM70) of over 50 000 hours

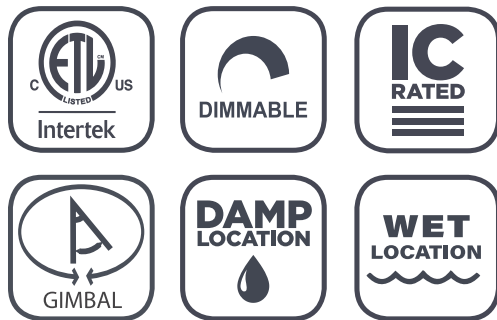



#### Overview

|                       |                          |
|-----------------------|--------------------------|
| Light source          | LED                      |
| Watts (W)             | 8W                       |
| Voltage               | 120V                     |
| Lumen output (LM)     | 650LM                    |
| Efficiency (LM/W)     | 81LM/W                   |
| Color temperature (K) | 2700/3000/3500/4000/5000 |
| CRI                   | 90CRI, 97CRI             |



# LED 3" Gimbal Flush Downlight

## DIMENSIONS



### 3" Round

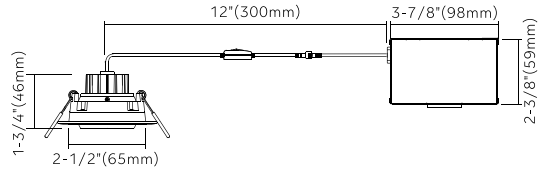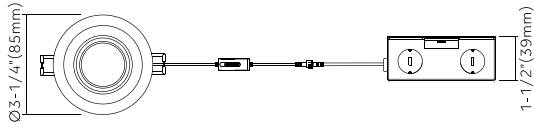

### 3" Square

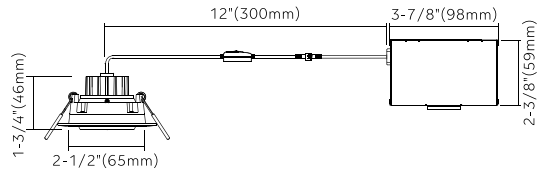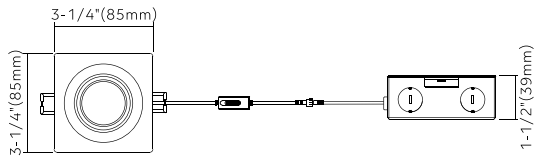

### Rough-in Frames



### UNV

Multi-size: 2.5", 4" and 6" new construction rough-in plate with collar for use with universal LED module

# LED 3" Gimbal Flush Downlight

## SPECIFICATIONS

| MODEL          | WATTAGE | LUMENS | EFFICIENCY | CCT                      | CRI | RATED LIFETIME |
|----------------|---------|--------|------------|--------------------------|-----|----------------|
| GLI-GFD3-8-5SK | 8W      | 650LM  | 81LM/W     | 2700/3000/3500/4000/5000 | 90  | 50 000 hours   |

## ORDERING GUIDE

| SERIES          | WATTAGE            | CCT                                                       | CRI                                                  | DRIVER           | REFLECTOR/TRIM                                                            | FINISH                                                                                                                         |
|-----------------|--------------------|-----------------------------------------------------------|------------------------------------------------------|------------------|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>GLI-GFD3</b> | <b>8</b> - 8 Watts | <b>5SK</b> - 5 CCT Selectable<br>2700/3000/3500/4000/5000 | <b>90</b> - 90 CRI<br><b>97<sup>1</sup></b> - 97 CRI | <b>V1</b> - 120V | <b>RS</b> - Round Smooth Reflector<br><b>SS</b> - Square Smooth Reflector | <b>WH</b> - Matte White<br><b>BK</b> - Matte Black<br><b>BZ<sup>1</sup></b> - Bronze<br><b>BN<sup>1</sup></b> - Brushed Nickel |

| CABLE                                        | ROUGH-IN FRAME                        | ACCESSORIES                       |
|----------------------------------------------|---------------------------------------|-----------------------------------|
|                                              | APPEND REQUIRED CODES                 | APPEND REQUIRED CODES             |
| <b>FT1</b> - FT1 Luminaire cable             | <b>UNV</b> - Universal Rough-In Frame | <b>F106</b> - 6' extension cable  |
| <b>FT4<sup>1</sup></b> - FT4 Luminaire cable |                                       | <b>F110</b> - 10' extension cable |
| <b>FT6<sup>1</sup></b> - FT6 Luminaire cable |                                       | <b>F120</b> - 20' extension cable |

### NOTES

(1) Subject to minimum order quantity