

Linear Profile LED

Project: _____ Location: _____ Type: _____
Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-LP57U

Linear Profile LED

Add a touch of sophistication to your environment with the Linear Profile LED. Extensive mounting options facilitate the creation of unique lighting solutions. Its minimalist and elegant design makes it easy to integrate within a wide variety of spaces such as modern corporate offices, architectural lobbies and more. The energy efficient LED array is seamlessly enclosed in a durable extruded aluminum housing with excellent heat dissipation properties and extended lifetime.

Features and Specifications

Construction:

- Extruded aluminum with high thermal conductivity properties
- Standard 100% downwards direct light emitter. Optional upper indirect and downwards direct light emitter with 30%/70% light distribution.
- Premium optics available in 30m roll for linked installations
- Available in 2ft, and 4ft

LED

- High efficiency LEDs provide 100LM/W+
- Premium color rendering capability: 80 CRI

Installation

- Pendant mount
- Surface mount
- Recessed mount
- Wall mount

Electrical

- Electronic drivers are available for 120-277V
- Power factor over 0.9

Driver

- Dimmable from 100% to 1% with 0-10V dimming control.

Certifications

- cULus Listed

Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours







Overview


Light source	LED
Efficiency (LM/W)	100LM/W
Voltage	120V-277V
Wattage	18W, 25W, 36W, 50W
Lumen output (LM)	1954LM to 5090LM
Lumen output (LM/ft)	977LM/FT - 1308LM/FT
Color temperature (K)	3000K, 3500K, 4000K
CRI	80CRI, 90CRI

Linear Profile LED


DIMENSIONS

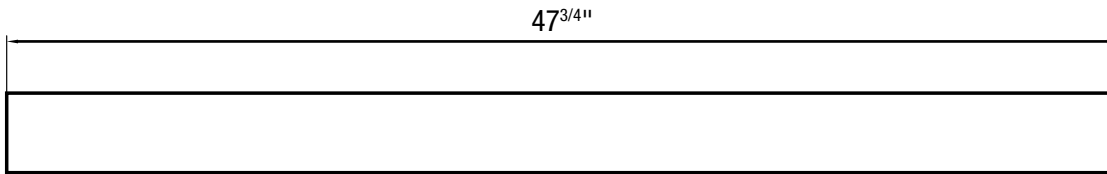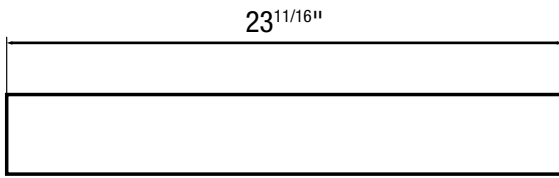

LIGHT DISTRIBUTION




Direct
100% Down



Direct + Indirect
70% Down + 30% Up

INSTALLATION

PENDANT

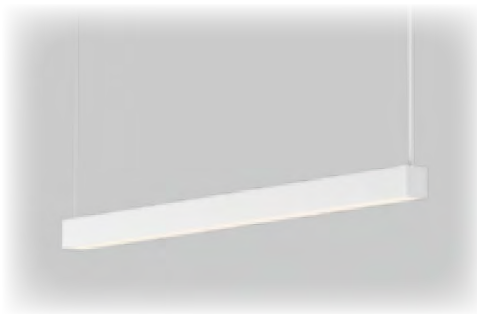



SURFACE



WALL



SEAMLESS CONTINUOUS CONNECTION WITHOUT SCREW EASILY

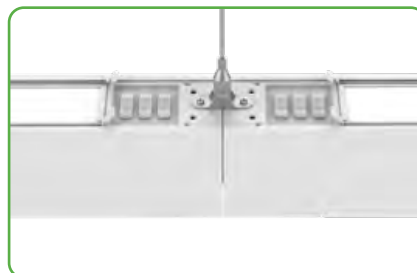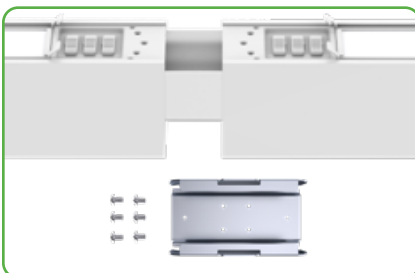

Linear Profile LED



SPECIFICATIONS

MODEL	WATTAGE	LUMENS	EFFICACY	LUMENS/FOOT	LIGHT DISTRIBUTION	CCT	CRI
GLI-LP57U-DL-2-40K	18W	1954LM	109LM/W	977LM/FT	Direct	4000K	80CRI
GLI-LP57U-FL-2-40K	25W	2616LM(1831LM + 785LM)	105LM/W	1308LM/FT	Direct+Indirect	4000K	80CRI
GLI-LP57U-DL-4-40K	36W	3630LM	101LM/W	908LM/FT	Direct	4000K	80CRI
GLI-LP57U-FL-4-40K	50W	5090LM(3563LM + 1527LM)	102LM/W	1273LM/FT	Direct+Indirect	4000K	80CRI

ORDERING GUIDE


SERIES	LIGHT DISTRIBUTION	SIZE	CCT	MOUNTING	OPTIONS
GLI-LP57U					APPEND REQUIRED CODES
	DL - Direct light	2 - 2ft	30K - 3000K	CP - Cable Pendant	LN - linking brackets
	FL - Direct/Indirect	4 - 4ft	40K - 4000K	SM - Surface mount	LR - 30m continuous lens
			50K - 5000K	RM - Recessed mount	
			3SK - 3CCT select	WM - Wall mount	

COLOR TEMPERATURE & LIGHT DISTRIBUTION FIELD ADJUSTABLE CONTROLS

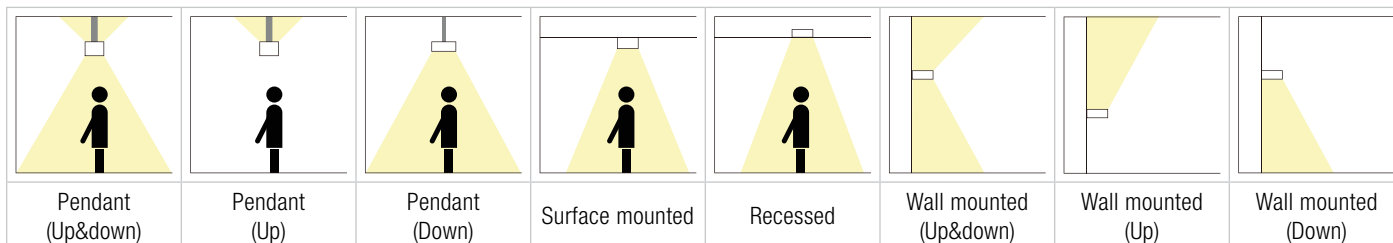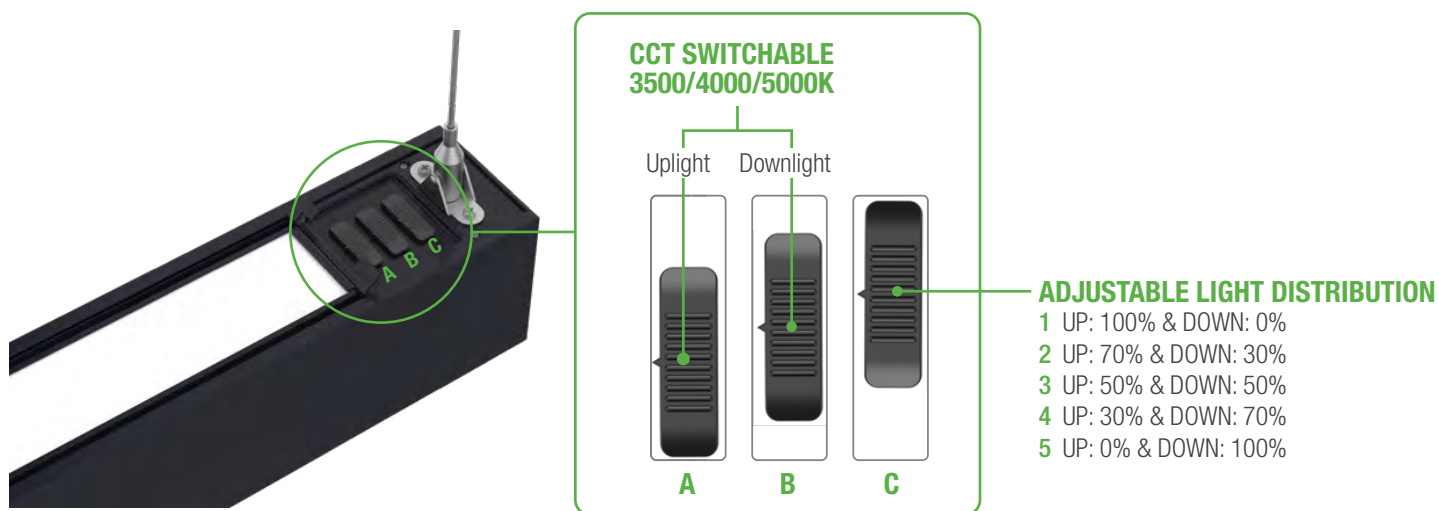

Linear Profile LED

MOUNTING ACCESSORIES

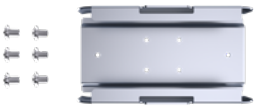				
Straight Connector	L Connector	T Connector	+ Connector	Cutttable Flexible Cover
				
Round Canopy & Power Cable	Square Canopy & Power Cable	Microwave Motion Sensor (Merrytek)	Emergency Battery Backup	