

Multipurpose Downlight Module

Project: _____ Location: _____ Type: _____
Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-MDM

Multipurpose Downlight Module

The GOLED GLI-MDM Multipurpose Downlight Module is a cost effective downlight usable in new construction and retrofit projects. Integrated unit contains all components in one housing facilitating a speedy, hassle free installation.

Features and Specifications

- High diffusion lens provides pleasant well distributed light
- Integrated unit contains all components in one housing ready to be installed
- Luminaire is held in place by spring clips, making it easy to install remove and always flush
- Optional new construction frame
- Excellent for new construction or retrofit applications
- Insulated ceiling rated
- Wide range switch selectable 3CCT(3000K//4000K/5000K) and 5CCT (2700K/3000K/3500K/4000K/5000K)
- Operating temperature from -30°C to +40°C
- White finish
- Standard TRIAC Dimmable
- 10W, 60LM/W, 600LM
- 13W, 77LM/W, 1000LM
- 120V-277V

Certifications

- cETLus Listed
- Wet location rated

Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours




Overview

Light source	LED
Watts (W)	10W, 13W
Voltage	120V-277V
Lumen output (LM)	600LM, 1000LM
Efficiency (LM/W)	60LM/W, 77LM/W
Color temperature (K)	Selectable: 2700K, 3000K, 3500K 4000K, 5000K
CRI	90CRI

Multipurpose Downlight Module

DIMENSIONS

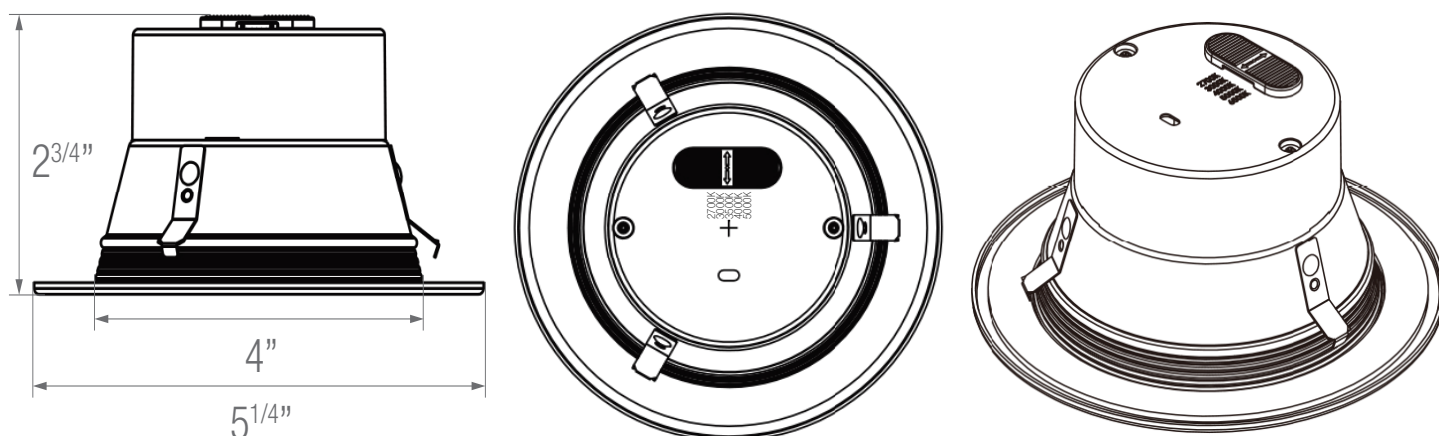

SPECIFICATIONS

CODE	DIMENSIONS	CUT-OUT	WATTAGE	LUMENS	LUMENS/WATT	CCT	CRI	RATED LIFETIME
GLI-MDM-4-10	Ø5 1/4 in	Ø4 in	10W	600LM	60LM/W	Selectable 3CTT	90	50 000 hours
GLI-MDM-4-13	Ø5 1/4 in	Ø4 in	13W	1000LM	77LM/W	Selectable 5CTT	90	50 000 hours

ORDERING GUIDE

SERIES	SIZE	WATTAGE	CCT	OPTIONS
GLI-MDM				APPEND REQUIRED CODES
	4 - 4in	10 - 10 Watts	3SK - 3 selectable CCT	RF - Rough-in frame
		13 - 13 Watts	5SK - 5 selectable CCT	RR - Retrofit box