

Linear Led Wrap Light

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-WLLC

Linear Led Wrap Light

The GOLED Linear LED Wrap Light is meticulously designed for various applications, including offices, classrooms, hallways, parkades, stairwells, and service areas. With an optional occupancy sensor, it delivers efficient and smart lighting based on occupancy, guaranteeing optimal illumination and energy conservation while prioritizing safety.

Features and Specifications

- Rugged high efficiency linear light makes for a cost efficient utilitarian light
- White enamel finish
- 2ft and 4ft lengths available
- Available in 3000K, 3500K, 4000K, 4500K, 5000K
- High lumen per watt output of 90LM/W
- Available for 120V
- 0-10V dimming and DALI control
- Surface installation and suspended installation
- Operating temperature between -20c to 40c
- Optional battery back up
- Optional occupancy sensor

Certifications

- cULus Listed
- Damp location

Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours




Overview

Light source	LED
Watts (W)	25W, 40W
Voltage	120V
Lumen output (LM)	2290LM, 3817LM
Efficiency (LM/W)	92LM/W, 95LM/W
Color temperature (K)	3000K, 3500K, 4000K, 4500K, 5000K
CRI	82CRI

Linear Led Wrap Light

DIMENSIONS

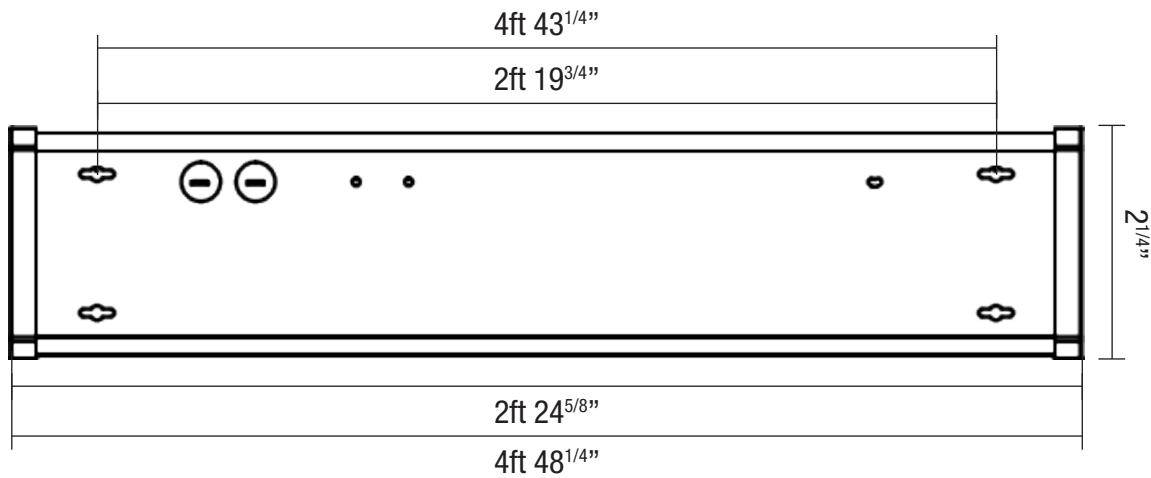

SPECIFICATIONS

CODE	WATTAGE	LENGTH	LUMENS	LUMENS/WATT	CCT	CRI	RATED LIFETIME
GLI-WLLC-2	25 Watts	2ft	2290LM	92LM/W	4000K	82CRI	50 000 hours
GLI-WLLC-4	40 Watts	4ft	3817LM	95LM/W	4000K	82CRI	50 000 hours

ORDERING GUIDE

SERIES	SIZE/WATTAGE	CCT	LENS	CONTROL	EMERGENCY	MOUNTING
GLI-WLLC						
	2 - 2ft 25 Watts	30K - 3000K	ML - Milky lens	NC - No control	NB - No battery	CM - Chain mount
	4 - 4ft 40 Watts	35K - 3500K	CL - Clear lens	DM - 0-10V	BB - Battery back up	SM - Surface mount
		40K - 4000K	NL - No lens	DL - DALI		
		45K - 4500K				
		50K - 5000K				