

Wraparound Light

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-WLLH

Wraparound Light

GOled WLLH Wraparound Light is robustly built for indoor hallways, parkades, stairwells and service areas. The optional sensor offers dimming and shutdown based on occupancy, timing, and ambient light. This ensures excellent illumination and power savings without compromising safety.

Features and Specifications

- Rugged high-efficiency linear light suitable for cost-effective utility lighting
- Available in 2ft, 4ft, and 8ft lengths to suit various lighting needs
- Color temperature choices are 3000K, 3500K, 4000K and selectable 3CCT with options of 3000/4000/5000K or 3000/3500/4000K
- Boasts a standard high output of 130 lumens per watt for excellent power savings and brightness
- Operates on standard 120-277V input voltage with an optional 120-347V variant for added flexibility
- Suitable for both surface and suspended installations to accommodate different mounting preferences
- Enables easy creation of continuous rows of lights through interconnection with internal wiring
- Provides optional 0-10V dimming capability for enhanced lighting control
- Offers optional occupancy and light sensors for added functionality and energy efficiency
- Features optional emergency backup battery for continued operation during power outages



Overview

Light source	LED
Watts (W)	20W to 100W
Voltage	120-277V, 120-347V
Lumen output (LM)	2600LM to 13000LM
Efficiency (LM/W)	130LM/W
Color temperature (K)	3000K, 3500K, 4000K, 3CCT selectable (3000/4000/5000K) 3CCT selectable (3000/3500/4000K)
CRI	80CRI

Certifications

- cETLus Listed
- IP20 water ingress rating
- DLC Premium


Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours


Wraparound Light

DIMENSIONS


8 foot

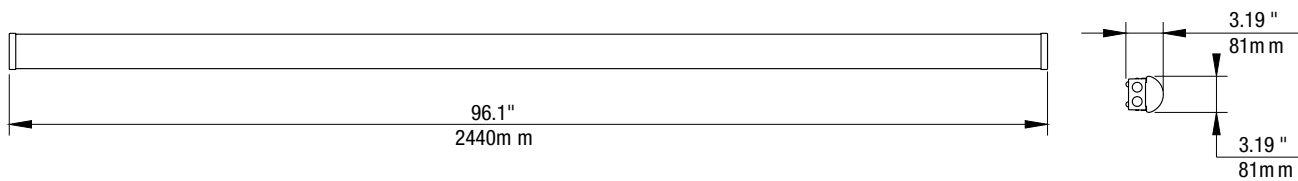

4 foot

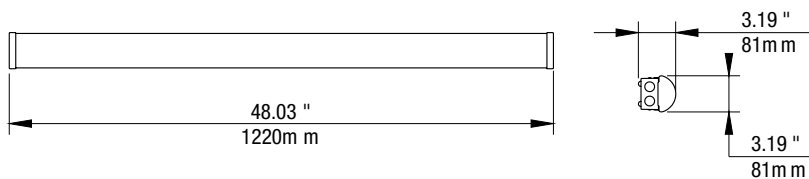

2 foot

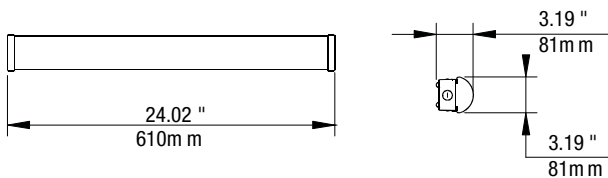

SENSOR OPTIONS

FEATURE	DESCRIPTION
Detection Type	360° Microwave Motion Sensor, up to 15m radius (max. 4m mounting height)
Bi-Level Dimming	100% brightness with motion; standby dimming at 10%, 30%, or 50%; shut-off option
Hold Time	Adjustable: 10s / 1min / 5min / 10min / 15min
Daylight Sensor	Lux threshold selectable: 10 Lux / 30 Lux / 50 Lux / Disable
Standby Time	∞ (always dimmed) / 10 min / 30 min / 60 min
Detection Sensitivity	Adjustable: 20% / 50% / 75% / 100%
Remote Control	RC-100 compatible for easy programming
Dimming Output	0–10V interface for dimmable LED drivers and ballasts

SPECIFICATIONS

CODE	SIZE	WATTAGE	LUMENS@FULL	LUMENS@MID	LUMENS@LOW	LUMENS/WATT
GLI-WLLH-2-20F	2ft	20W	2600LM	N/A	N/A	130LMW
GLI-WLLH-4-32F	4ft	32W	4160LM	N/A	N/A	130LMW
GLI-WLLH-4-40F	4ft	40W	5200LM	N/A	N/A	130LMW
GLI-WLLH-4-40A	4ft	40/30/20W	5200LM	3900LM	2600LM	130LMW
GLI-WLLH-4-50A	4ft	50/40/30W	6500LM	5200LM	3900LM	130LMW
GLI-WLLH-8-60A	8ft	60/50/40W	7800LM	6500LM	5200LM	130LMW
GLI-WLLH-8-64F	8ft	64W	8320LM	N/A	N/A	130LMW
GLI-WLLH-8-80A	8ft	80/60/40W	10400LM	7800LM	5200LM	130LMW
GLI-WLLH-8-100A	8ft	100/80/60W	13000LM	10400LM	7800LM	130LMW

ORDERING GUIDE

SERIES	SIZE	WATTAGE	VOLTAGE	CCT	CONTROL
GLI-WLLH					
	2 - 2ft	20F - 20 Watts	V1 - 120-277V	30K - 3000K	NC - No control
		32F - 32 Watts	V2 - 120-347V	35K - 3500K	DM - 0-10V
	4 - 4ft	40F - 40 Watts		40K - 4000K	
		40A - 40/30/20W		3SKC - 3CCT select (3000/4000/5000K)	
		50A - 50/40/30W			
	8 - 8ft	60A - 60/50/40W		3SKW - 3CCT select (3000/3500/4000K)	
		64F - 64 Watts			
		80A - 80/60/40W			
		100A - 100/80/60W			

SENSOR	MOUNTING	OPTIONS
		APPEND REQUIRED CODES
NS - No sensor	CS - Cable suspension	LN - linking brackets
US - Daylight/occupancy sensor with stand by light	SM - Surface	