


LED 3.5" Multi Recessed Downlight

Project: _____ Location: _____ Type: _____
Model Number: _____ Qty: _____ Notes: _____ Date: _____

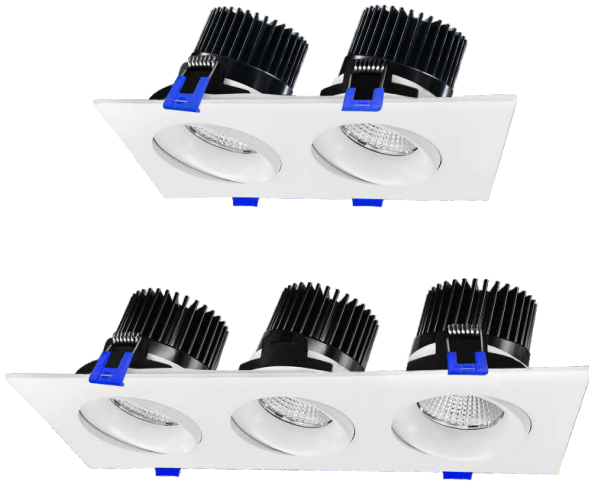

GLI-MRD35

LED 3.5" Multi Recessed Downlight

The GOLED Multi Recessed Downlight series construction provides a versatile downlight that rotates and tilts to provide light and accent where required. They are offered in singles and two or three multi modules. This allows for quick and exact installation of multiple lights.

Features and Specifications


- Available in 3 downlight pack, 2 downlight pack and single round or square downlight
- Modules from one pack connect to one driver
- 15° tilt and 360° rotation provides unparalleled freedom of movement
- Available with 5 field selectable CCTs (2700/3000/3500/4000/5000)
- Highly durable die-cast aluminum body provides effective cooling
- Spring mounting clips ensure a centered, gapless installation by securely snapping the product in place
- New construction rough in plates available
- No housing required
- Standard FT1 rated driver cable, FT4 and FT6 rated cable optional
- Input voltage: AC 120V 50/60 Hz, optional 120-347V 50/60 Hz
- Quick and simple installation process
- TRIAC/ELV Dimmable (10% to 100%), optional 0-10V dimming

Certifications

- cETLus Classified
- Wet location rated
- I.c. rated for direct contact with insulation

Warranty

- 5 years warranty
- Lifespan(LM70) of over 50 000 hours

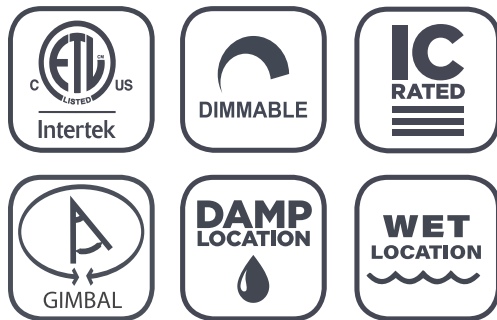


Overview

Light source	LED
Watts (W)	12W, 24W, 36W
Voltage	120-347V
Lumen output (LM)	1093LM, 1720LM, 2568LM
Efficiency (LM/W)	71LM/W, 72LM/W, 91LM/W
Color temperature (K)	2700/3000/3500/4000/5000
CRI	90CRI, 97CRI


LED 3.5" Multi Recessed Downlight

DIMENSIONS


3.5" Round

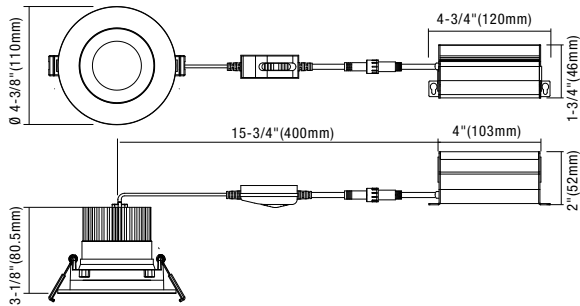


3.5" Square

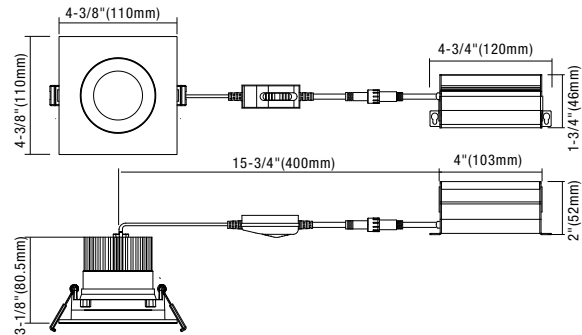



3.5" Double

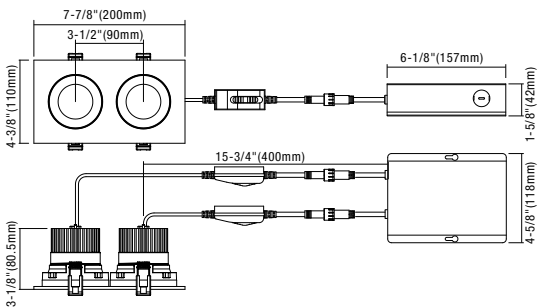

3.5" Triple

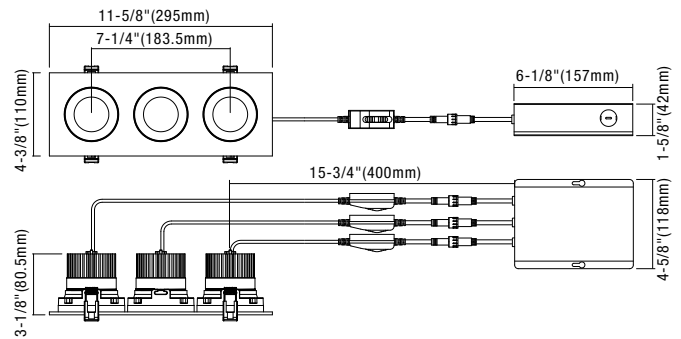

Rough-in Frames

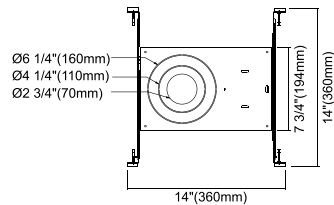

UNV

Multi-size: 2.5", 4" and 6" new construction rough-in plate with collar for use with universal LED module

LED 3.5" Multi Recessed Downlight

SPECIFICATIONS

MODEL	LIGHT HEADS	WATTAGE	LUMENS	EFFICIENCY	CCT	CRI	RATED LIFETIME
GLI-MRD35-12R	1	12W	1093LM	91LM/W	4000K	90	50 000 hours
GLI-MRD35-12S	1	12W	1093LM	91LM/W	4000K	90	50 000 hours
GLI-MRD35-24	2	24W	1720LM	72LM/W	4000K	90	50 000 hours
GLI-MRD35-36	3	36W	2568LM	71LM/W	4000K	90	50 000 hours

ORDERING GUIDE

SERIES	LIGHT ENGINE	CCT	CRI	VOLTAGE	FINISH
GLI-MRD35					
	12R - 12 Watts Single Round	5SK - 5 CCT Selectable	90 - 90 CRI	V1 - 120V	WH - Matte White
	12S - 12 Watts Single Square	2700/3000/3500/4000/5000	97' - 97 CRI	V2 - 120-347V	BK - Matte Black
	24 - Double module				BZ' - Bronze
	36 - Triple module				BN' - Brushed Nickel
	CONTROL	CABLE	ROUGH-IN FRAME	ACCESSORIES	
			APPEND REQUIRED CODES	APPEND REQUIRED CODES	
	TR - TRIAC compatible	FT1 - FT1 Luminaire cable	UNV - Universal Rough-In Frame	F106 - 6' extension cable	
	LV - 0-10V compatible	FT4' - FT4 Luminaire cable		F110 - 10' extension cable	
		FT6' - FT6 Luminaire cable		F120 - 20' extension cable	

NOTES

(1) Subject to minimum order quantity