

# Outdoor Wall Light D

Project: \_\_\_\_\_ Location: \_\_\_\_\_ Type: \_\_\_\_\_

Model Number: \_\_\_\_\_ Qty: \_\_\_\_\_ Notes: \_\_\_\_\_ Date: \_\_\_\_\_



## GLI-OWLD

### Outdoor Wall Light D

Improve the security and safety of your home or business with the new Outdoor Wall Light D from GoLED. Twin-head, energy efficient LEDs flood the wall with smooth, glare free light at 1,200 lumens. Constructed from high quality, durable materials, this luminaire is easy to install and maintenance free.

#### Features and Specifications

- Sleek design, ideal for decorative purposes
- Impact & weather resistant polycarbonate and diecast aluminum housing
- Glare free, frosted lens for even light distribution
- Maintenance free
- Twin-head LEDs provide uniform illumination
- Photocell light sensor with cap included
- LG 5630 LED chip with 10W power consumption providing 1,200 lumens of smooth light; equivalent to 75W conventional light source
- Optimal colour rendering capability: CRI >70
- Fixed CCT 3,000K

#### Certifications

- cETLus Classified
- IP65 waterproof

#### Warranty

- 5 years warranty
- Lifespan of over 50 000 hours




#### Overview

|                       |                     |
|-----------------------|---------------------|
| Light source          | LED                 |
| Watts (W)             | 10W                 |
| Voltage               | 120V                |
| Lumen output (LM)     | 1260LM              |
| Efficiency (LM/W)     | 105LM/W             |
| Color temperature (K) | 3000K, 4000K, 5000K |
| CRI                   | 80+CRI              |

## Outdoor Wall Light D

### DIMENSIONS

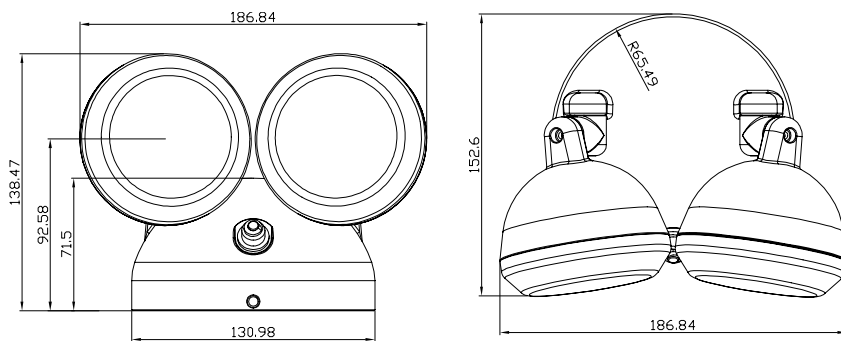

### SPECIFICATIONS

| MODEL    | WATTAGE | LUMENS | LUMENS/WATT | CCT   | CRI   | RATED LIFETIME |
|----------|---------|--------|-------------|-------|-------|----------------|
| GLI-OWLD | 12W     | 1260LM | 105LM/W     | 4000K | 80CRI | 50 000 hours   |

### ORDERING GUIDE

| SERIES          | CCT                | FINISH             |
|-----------------|--------------------|--------------------|
| <b>GLI-OWLD</b> |                    |                    |
|                 | <b>30K</b> - 3000K | <b>WH</b> - White  |
|                 | <b>40K</b> - 4000K | <b>BK</b> - Black  |
|                 | <b>50K</b> - 5000K | <b>SL</b> - Silver |
|                 |                    | <b>BZ</b> - Bronze |
|                 |                    | <b>GR</b> - Gray   |