


Slim Flush Mount Disk

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____

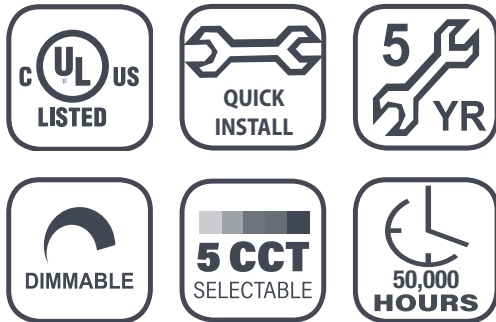

Overview

Light source	LED
Watts (W)	8W, 12W, 18W, 24W
Voltage	120V
Lumen output (LM)	656LM, 984LM, 1476LM, 1968LM
Efficiency (LM/W)	82LM/W
Color temperature (K)	Field selectable 5CCT
CRI	80+ CRI

GLI-SFMD

Slim Flush Mount Disk

The GOLED Slim Flush Mount Disk offers optimal value for a wide variety of applications. Designed for fast installation and built to last, these luminaires are equipped with a high diffusion lens, the latest generation of powerful LED chips providing high lumen output and up to 70% energy savings compared to standard CFL light bulbs. Virtually flush below the ceiling; it is excellent for low clearance applications. In regular applications it gives the impression of a more spacious space.

Features and Specifications

- Ultra slim disc is virtually flush with ceiling
- Aluminum heat sink enhances lifetime of all components
- Uniform light distribution without visible shadows or LED hot spots
- Can be installed in standard octagon lighting box or as retrofit
- Dimensions: 5", 7", 9", 12"
- Available in 8W(656LM), 12W(984LM), 18W(1476LM), and 24W(1968LM)
- Compatible with standard TRIAC dimmer
- White fixture with optional polished chrome, matte black, satin nickel, white/gold, and black/gold trim rings
- Field selectable 5CCT (2700/3000/3500/4000/5000)
- 110° beam angle
- 80+ CRI

Certifications

- cULus listed
- Wet location rated
- IP54 rated

Warranty

- 5 years warranty
- Lifespan of over 50 000 hours


Slim Flush Mount Disk

DIMENSIONS



UNITS: mm

in


8W Fixture

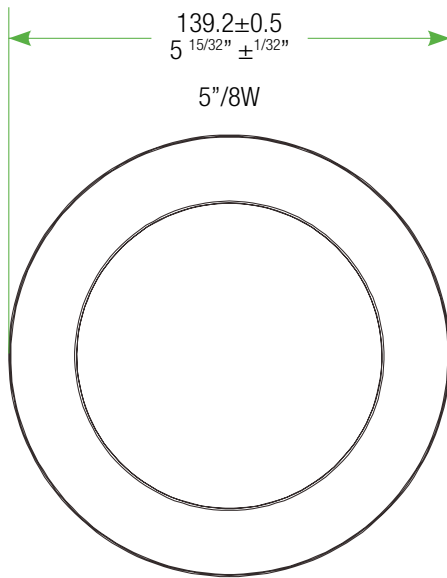


8W Trim ring

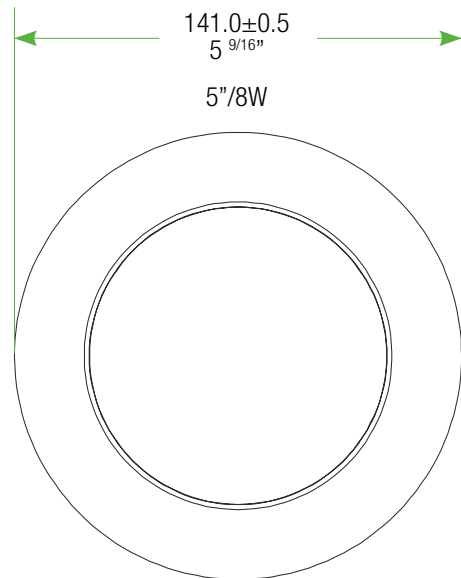

12W Fixture

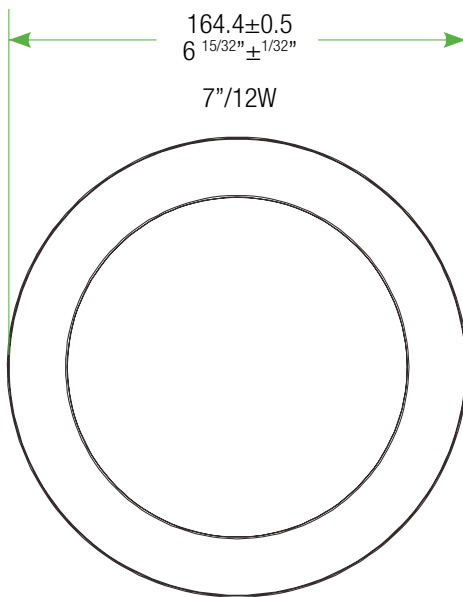

12W Trim ring

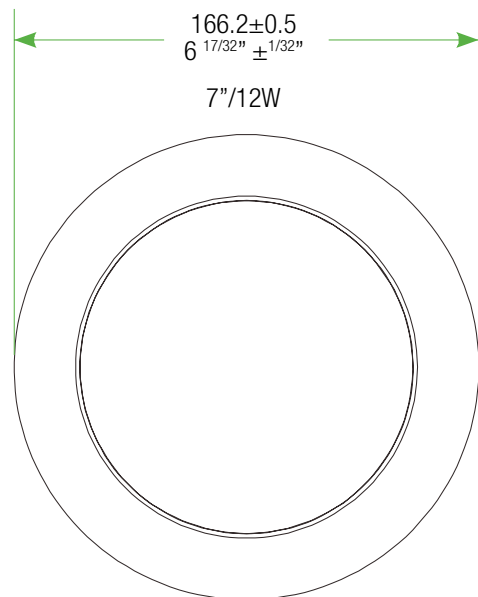


Slim Flush Mount Disk

DIMENSIONS


UNITS: mm

in


18W Fixture

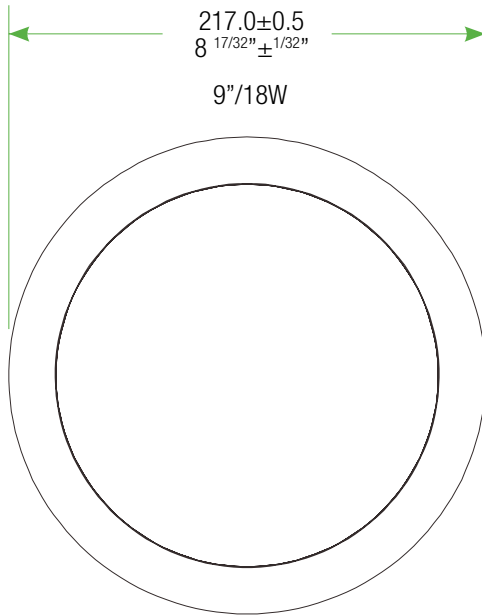


18W Trim ring

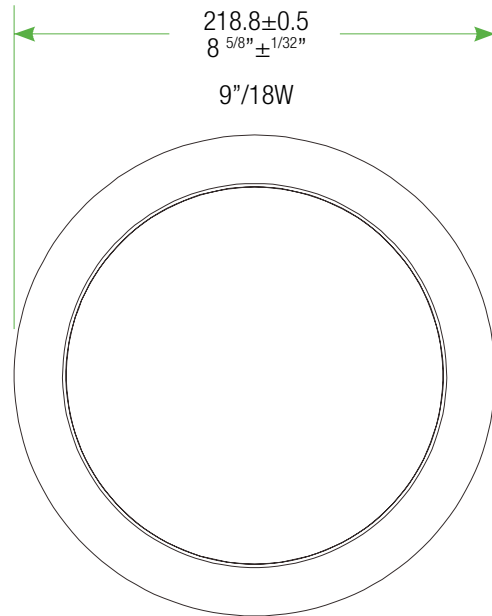

24W Fixture

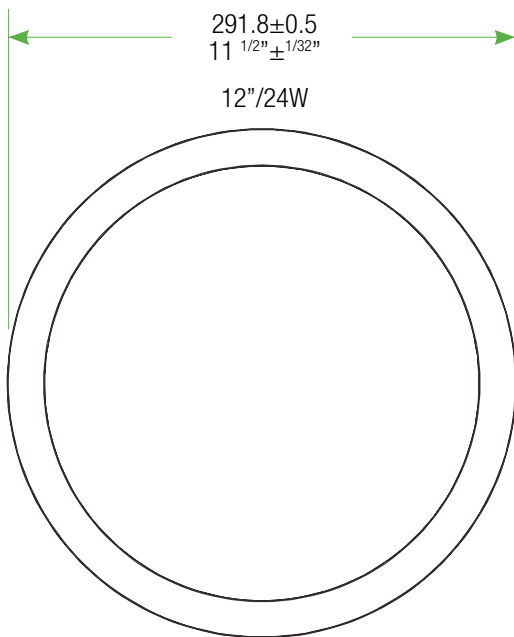


24W Trim ring

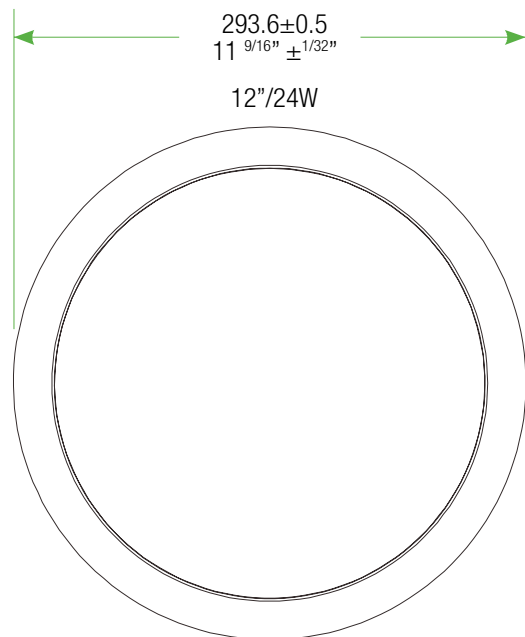

Slim Flush Mount Disk

FEATURES

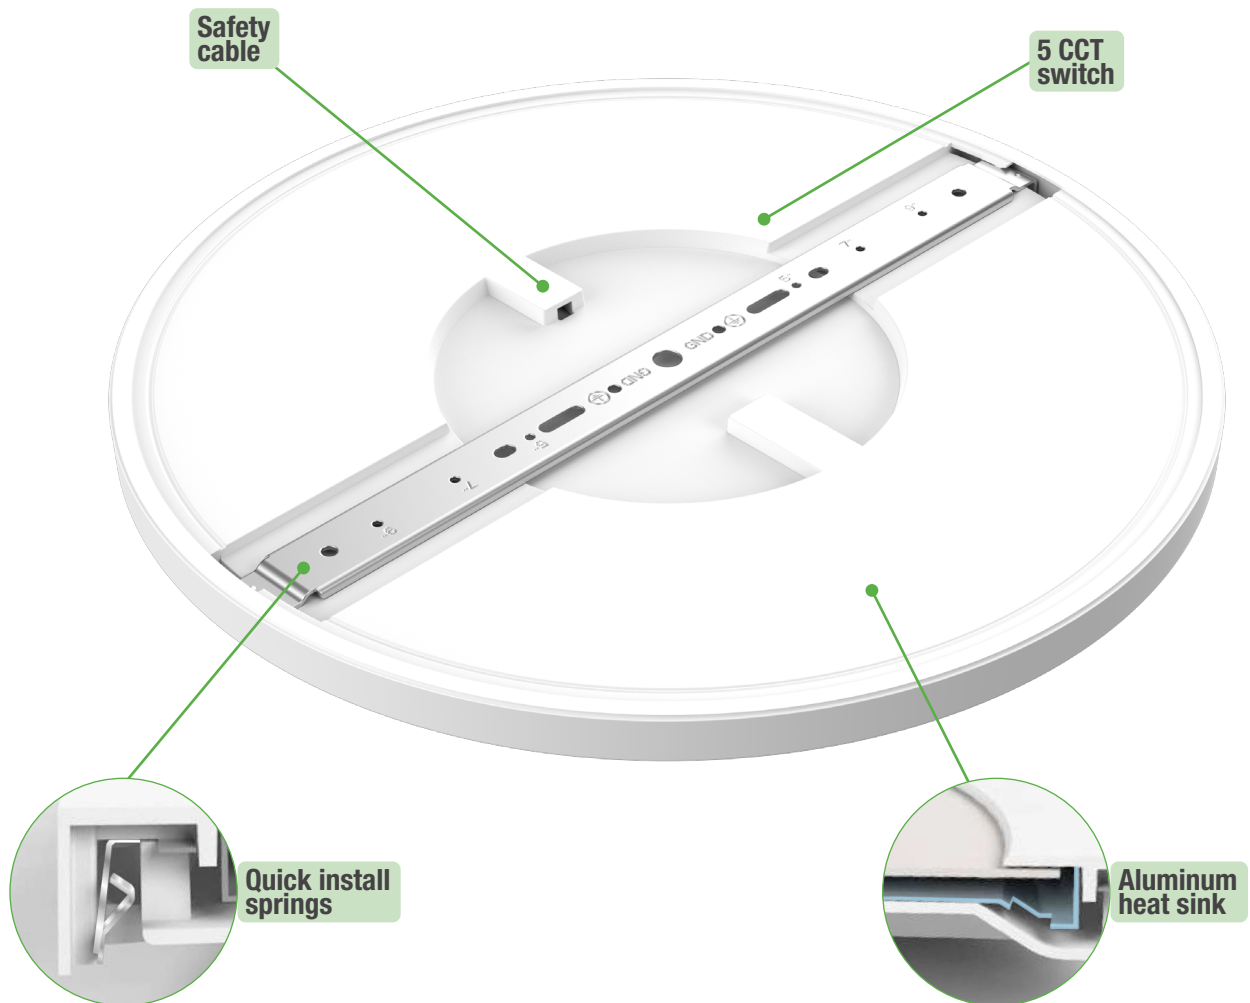

JB Installation



Retrofit



Trim Rings



Slim Flush Mount Disk

SPECIFICATIONS

CODE	WATTAGE	DIAMETER	LUMENS	LUMENS/WATT	BEAM ANGLE	CCT	CRI	RATED LIFETIME
GLI-SFMD-8	8W	5"	656LM	82LM/W	110°	2700K	80+	50 000 hours
GLI-SFMD-12	12W	7"	984LM	82LM/W	110°	3000K	80+	50 000 hours
GLI-SFMD-18	18W	9"	1476LM	82LM/W	110°	3500K	80+	50 000 hours
GLI-SFMD-24	24W	12"	1968LM	82LM/W	110°	4000K	80+	50 000 hours
						5000K	80+	50 000 hours

ORDERING GUIDE

SERIES	WATTAGE/SIZE	TRIM RING	MOUNTING
GLI-SFMD			
	8 - 8W 5"	WH - White	JB - Junction box
	12 - 12W 7"	MB - Matte black	RF - Retrofit
	18 - 18W 9"	SN - Satin nickel	
	24 - 24W 12"	PC - Polished chrome	
		WHG - White/Gold	
		BKG - Black/Gold	



Trim ring

Comes in two options WHG (White/Gold) and BKG (Black/Gold)