

Step Light Recessed

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-SLRA

Step Light Recessed

The GOLED Step Light Recessed is a rugged contemporary stair light designed for indoor and outdoor installation. Extra elements protection ensures the product will perform long term without showing signs of weathering.

Features and Specifications

- Die cast aluminum construction
- Stainless steel hardware
- Impact resistant tempered glass
- 3mils thermoset powder coat finish provides superior resistance to corrosion and weathering
- Low profile, flush with wall face
- Various dimensions ranging in wattage from 8W(260 Luminaire Flux) to 20W(640 Luminaire Flux)
- 80CRI

Certifications

- cETLus Listed
- Damp and wet location rated
- Approved for outdoor use

Warranty

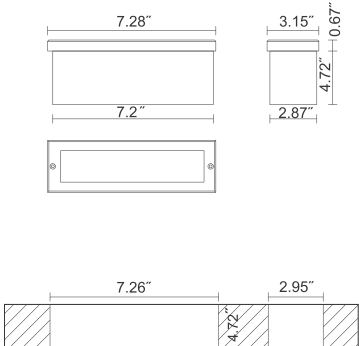
- 5 years warranty
- Estimated lifespan of over 50 000 hours

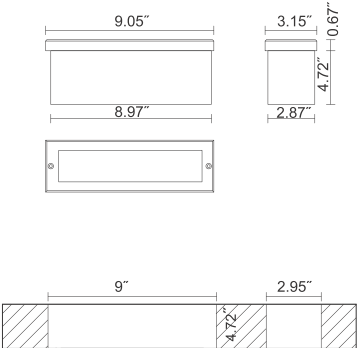


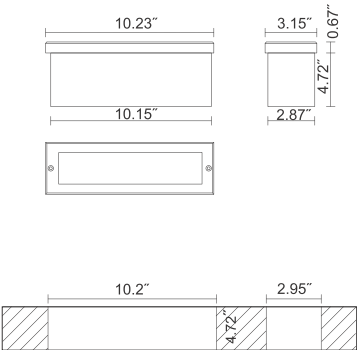
Overview

Light source	LED
Watts (W)	8W to 20W
Voltage	120V-277V
Lumen output (LUX)	260LUX to 640LUX
Efficiency (LUX/W)	32LUX/W+
Color temperature (K)	3000K, 4000K, 6000K
CRI	80+CRI

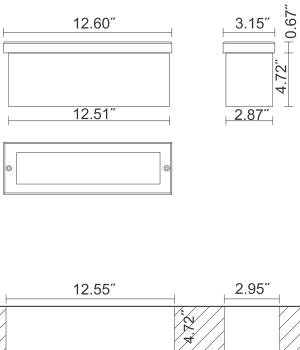

DIMENSIONS

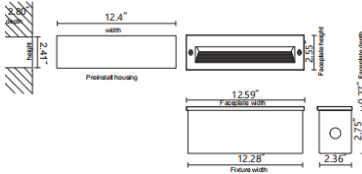
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2205		WATTAGE	6W
		LUMENS	128 Luminaire Flux
		LUMENS LOUVER	60 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	Polycarbonate Diffuse Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	90° Diffuse / Asymmetric (Louver)
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

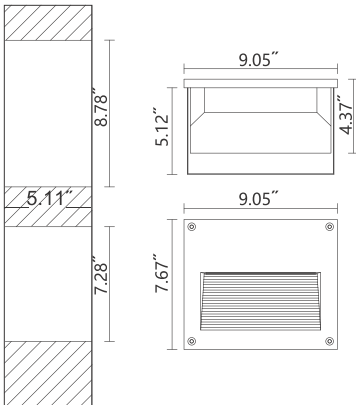
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2207		WATTAGE	7W
		LUMENS	138 Luminaire Flux
		LUMENS LOUVER	70 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	Polycarbonate Diffuse Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	90° Diffuse / Asymmetric (Louver)
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2209		WATTAGE	8W
		LUMENS	142 Luminaire Flux
		LUMENS LOUVER	75 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	Polycarbonate Diffuse Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	90° Diffuse / Asymmetric (Louver)
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

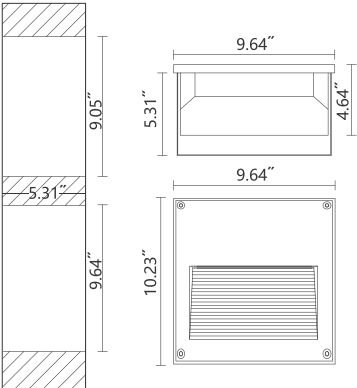
Step Light Recessed

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2301		WATTAGE	10W
LUMENS		136 Luminaire Flux	
LUMENS LOUVER		32 Luminaire Flux	
HOUSING		Die-Cast Aluminum	
GASKET		Silicone Rubber	
COVER LENS		Polycarbonate Diffuse Lens	
SURFACE FINISH		Powder Coated	
DRIVER TYPE		Constant Current	
INPUT VOLTAGE		100~277V/AC	
AMBIENT TEMPERATURE		-20°C~45°C	
	BEAM ANGLE	90° Diffuse / Asymmetric (Louver)	
	INGRESS PROTECTION	IP65	
	CERTIFICATIONS	cETLus	

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2006	 Technical drawing of the GLI-SLRA-2006 luminaire showing front, side, and detail views with dimensions. - Frontal housing: 12.4" width, 2.41" height. - Frontal housing detail: 12.59" width, 12.28" fixture width, 2.36" height. - Frontal housing detail: 2.75" height, 0.27" width. - Frontal housing detail: 2.41" height, 0.27" width.	WATTAGE	12W
		LUMENS	496 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	Polycarbonate Diffuse Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	Asymmetric
	INGRESS PROTECTION	IP65	
	CERTIFICATIONS	cETLus	

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2155		WATTAGE	8W
		LUMENS	260 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	PMMA Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	Asymmetric
		INGRESS PROTECTION	IP65
CERTIFICATIONS	cETLus		

Step Light Recessed

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2165		WATTAGE	16W
		LUMENS	104 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	PMMA Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	Asymmetric
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

ORDERING GUIDE

SERIES	PRODUCT CODE	FACEPLATE	CCT	FINISH
GLI-SLRA				
	2205	DF - Diffuser	30K - 3000K	BK - Black RAL9011
	2207	LV - Louver	40K - 4000K	WH - White RAL9016
	2209		60K - 6000K	GR - Gray RAL7012
	2301			MB - Mineral bronze
	2006	OF - Open (no faceplate)		SI - Silver RAL9006
	2155			
	2165			

CONTROL	OPTIONS
	APPEND REQUIRED CODES
ND - No dimming	MG - Marine grade hardware
DM - 0-10V Dimming	