

Surface Mount Disk R

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-SMDR

Surface Mount Disk R

The GOLED Surface Mount Disk R offers optimal value for a wide variety of applications. Designed for fast installation and built to last, these luminaires are equipped with a high diffusion lens, the latest generation of powerful LED chips, providing high lumen output and up to 70% energy savings compared to standard CFL light bulbs. It is virtually flush with the ceiling, making it excellent for low clearance applications. In regular applications, it gives the impression of a more spacious space.

Features and Specifications

- The ultra-slim disc light is virtually flush with the ceiling
- Aging and weathering resistant polycarbonate body
- Uniform light distribution without visible shadows or LED hot spots
- Designed to work with standard octagon junction boxes
- Available selection of: 5Øin 9W 630LM, 7Øin 12W 840LM, 9Øin 18W 1260LM, 12Øin 24W 1680LM
- White finish
- Standard TRIAC dimmer compatible
- Field selectable CCT options include 3000K, 4000K, and 5000K
- 80+ CRI
- Dry location only, IP20

Certifications

- cETLus Classified

Warranty

- 5 years warranty
- Lifespan of over 50 000 hours


Overview

Light source	LED
Watts (W)	9W, 12W, 18W, 24W
Voltage	120V
Lumen output (LM)	630LM, 840LM, 1260LM, 1680LM
Efficiency (LM/W)	70LM/W
Color temperature (K)	3000K, 4000K, 5000K selectable
CRI	80 CRI


Surface Mount Disk R

DIMENSIONS


9 Watts 50in

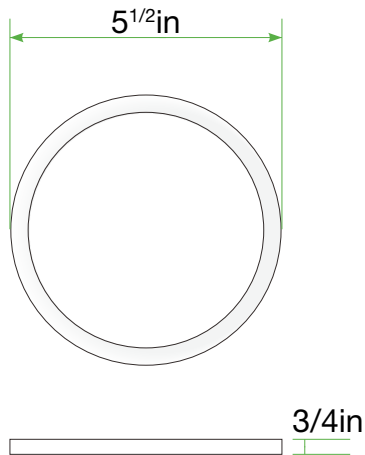


12 Watts 70in

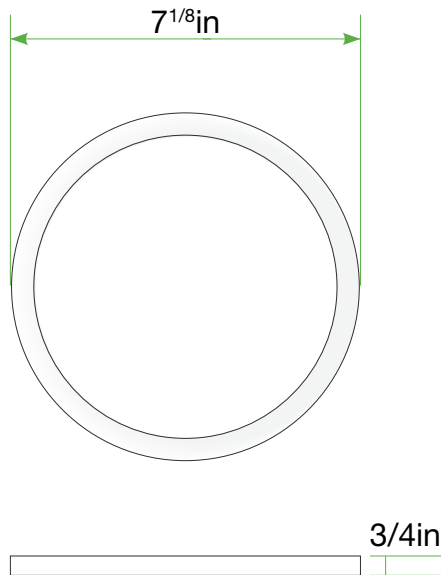

18 Watts 90in

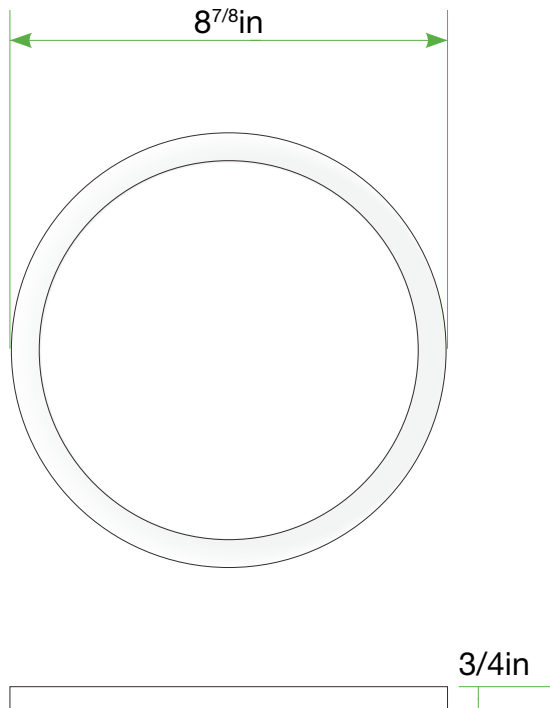

24 Watts 120in

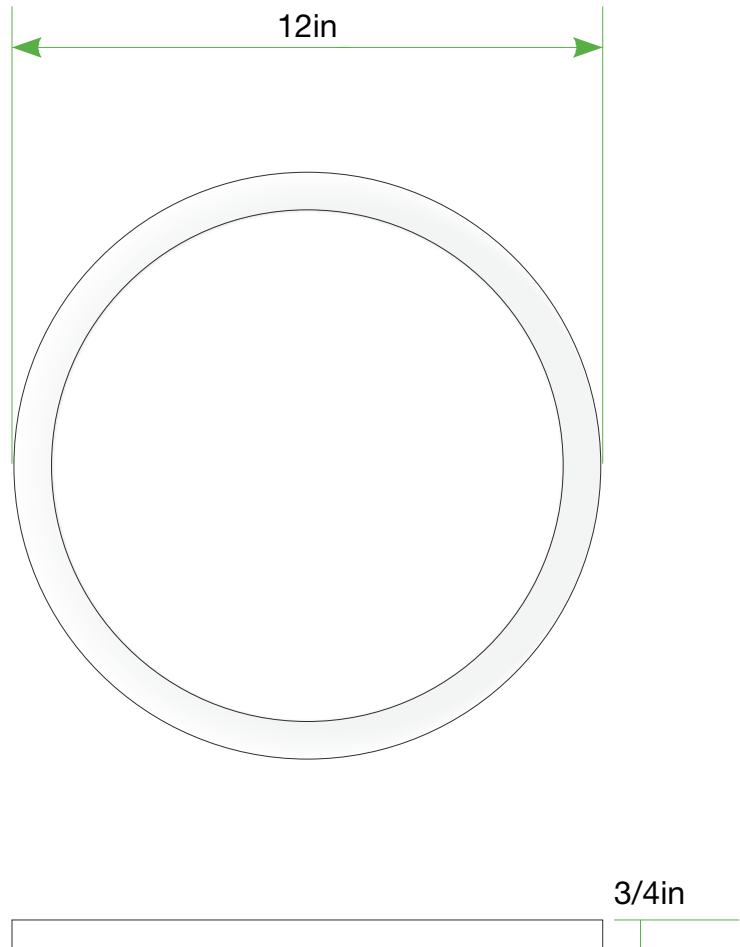

Surface Mount Disk R

SPECIFICATIONS

CODE	WATTAGE	DIAMETER	LUMENS	LUMENS/WATT	CCT	CRI	RATED LIFETIME
GLI-SMDR-9	9W	50in	630LM	70LM/W	4000K	80+	50 000 hours
GLI-SMDR-12	12W	70in	840LM	70LM/W	4000K	80+	50 000 hours
GLI-SMDR-18	18W	90in	1260LM	70LM/W	4000K	80+	50 000 hours
GLI-SMDR-24	24W	120in	1680LM	70LM/W	4000K	80+	50 000 hours

ORDERING GUIDE

SERIES	WATTAGE/SIZE	CCT	FINISH
GLI-SMDR			
	9 - 9 Watts 50in	30K - 3000K	WH - Matte White
	12 - 12 Watts 70in	40K - 4000K	BK - Matte Black
	18 - 18 Watts 90in	50K - 5000K	
	24 - 24 Watts 120in		